
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

CROUZET GN3 SERIES SOLID STATE RELAY

Panel mount - AC output Three phase

GN350ASZH
SSR, 50A, IN 24-255VAC/DC, OUT 510VAC ZC

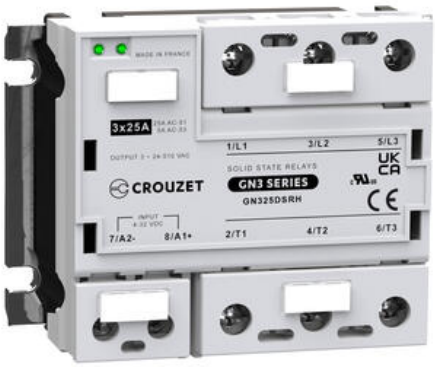

- Zero cross or instantaneous switching
- Output current 25 or 50 amps
- Built-in overvoltage protection
- LED input status indicator

PRODUCT DESCRIPTION

TECHNICAL DATA

OVERVIEW

Output current	50 A
Output voltage	24-510V ac
Control voltage	24-255V ac
Mounting	Panel mount
Type of control	Special zero voltage turn on

OUTPUT SPECIFICATION

Output voltage	24-510V ac
Transient Voltage	1200 V pk
Maximum off-state leakage current	1 mA rms
1 Second surge current	230
Maximum 1 cycle surge current	700/_ (min) 750 (typ)
Maximum on-state voltage drop	1.375 Vpk
Thermal resistance junction to case	0.4 °C/W
Maximum 1/2 Cycle I^2t for fusing (A^2 sec)	2540/2800
Minimum heat sink for rated current @ 40 °C	1.5 °C/W
Number of poles	3

INPUT SPECIFICATION

Control voltage	24-255V ac
Maximum reverse voltage	N/A
Minimum turn-on voltage	24V ac
Must turn-off voltage	2V ac
Input current min	5 mA
Input Current Max	7 mArms
Maximum turn-on time (ms)	25 ms
Maximum turn-off time (ms)	50 ms

GENERAL SPECIFICATION

Dielectric strength input to output (50/60Hz)	4000 V rms
Ambient operating temperature	-40 ... +80°C
Ambient storage temperature	-40 ... +100°C
Weight	200 g
Height	69.3 mm
Width	100 mm
Depth	34.7 mm
Housing material	UL94 V-0
Material base	Aluminium
LED input status indicator	Green
Approvals	CE, cRUus, UKCA