


PREPUNCHED COPPER BARS

BRP

BRP1010
BRP 63X5

- Length : 1750 mm
- Thickness : 5 mm and 10 mm
- Drilled with 10,5 mm diameter at 25 mm distance

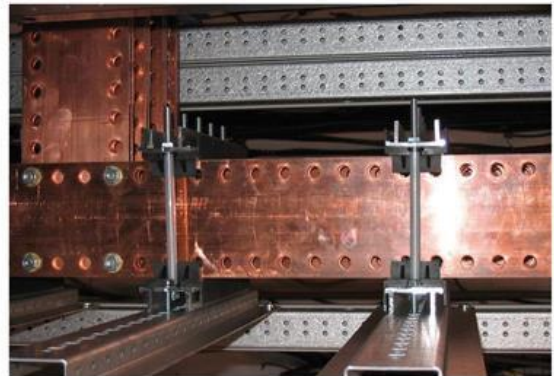

PRODUCT DESCRIPTION

Teknomega have created a free to download software for calculating and selecting the most suitable busbar for your application. [Find out more here.](#)

Teknomegas pre-punched copper bars are the ideal products for instantaneous use. Pre-punched with 10.5mm diameter holes at a 25mm distance, also available in 5 and 10mm thickness. These busbars are mainly used in distribution bar cabinets. Having a range of copper bars with single or double pre-drilled holes, you save time in assembly and processing bars in the wiring of electrical equipment.

TECHNICAL DATA

GENERAL DATA

Cross section	315 mm ²
Current at ΔT 50°C	951 A

DIMENSIONS

Length	1750 mm
Thickness	5 mm
Width	63 mm
Distance to hole centres	12.5 mm
Hole diameter	10.5 mm
Length between hole centres	25 mm

AMPACITY

Current at ΔT 30°C	718 A
----------------------------	-------

ADDITIONAL DATA

Pack size	2
Weight	4.39 kg

