


PREPUNCHED COPPER BARS

BRP

BRP1035
BRP 60X10

- Length : 1750 mm
- Thickness : 5 mm and 10 mm
- Drilled with 10,5 mm diameter at 25 mm distance

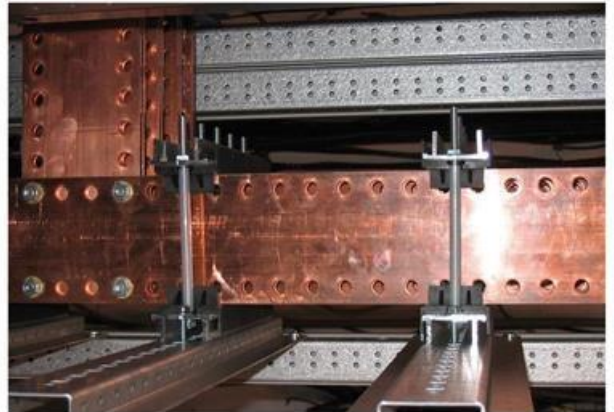

PRODUCT DESCRIPTION

Teknomega have created a free to download software for calculating and selecting the most suitable busbar for your application. [Find out more here.](#)

Teknomegas pre-punched copper bars are the ideal products for instantaneous use. Pre-punched with 10.5mm diameter holes at a 25mm distance, also available in 5 and 10mm thickness. These busbars are mainly used in distribution bar cabinets. Having a range of copper bars with single or double pre-drilled holes, you save time in assembly and processing bars in the wiring of electrical equipment.

TECHNICAL DATA

GENERAL DATA

Cross section	600 mm ²
Current at ΔT 50°C	1214 A

DIMENSIONS

Length	1750 mm
Thickness	10 mm
Width	60 mm
Distance to hole centres	12.5 mm
Hole diameter	10.5 mm
Length between hole centres	25 mm

AMPACITY

Current at ΔT 30°C	916 A
----------------------------	-------

ADDITIONAL DATA

Pack size	2
-----------	---

Weight

8.79 kg

