OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

NEW ELECTRONIC HYGROSTAT - ETF 012 01260.0-00

01260.0-01 - HYGROTHERM 24-240VAC 0-60GR. 50-90% DIN

01260.0-00
HYGROTHERM 24-240VAC 0-60GR. 50-90%

- Wide Voltage Range
- Adjustable Temperature & Humidity
- Push In Terminals
- Optical Display

PRODUCT DESCRIPTION

The electronic hygrotherm simultaneously monitors temperature and air humidity in enclosures and casings. Condensation is avoided by switching the heating and fans as required

TECHNICAL DATA

GENERAL DATA

Control range temperature to	60 °C
Control range temperature from	32 °F
Hysteresis temperature	2 K
Control range humidity from	50 % RF
Control range humidity to	90 % RF
Hysteresis humidity	4 % RH
Mounting	Screw fixing, TS 35
Colour	Light grey

RATED OPERATING CONDITIONS

Inrush max	30 A
Operational temperature	-40 °C - 70 °C
Storage temperature	-45 °C - 85 °C
Operating humidity	≤95 % RH
Humidity storage	≤95 % RH

DIMENSIONS


Height	138 mm


Width	35 mm
Depth	69.5 mm
Weight	0.2 kg
Material plastic housing	UL94 V-0

SAFETY & APPROVALS


IP class	IP20


Frequency	45-65 Hz
Nominal voltage	24-240 V AC/DC

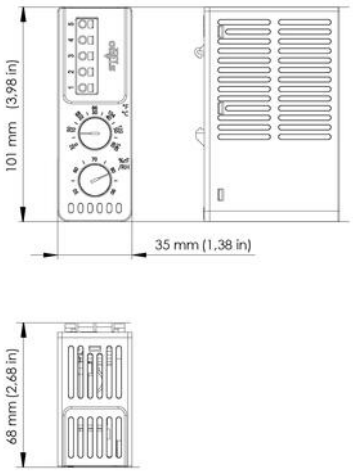


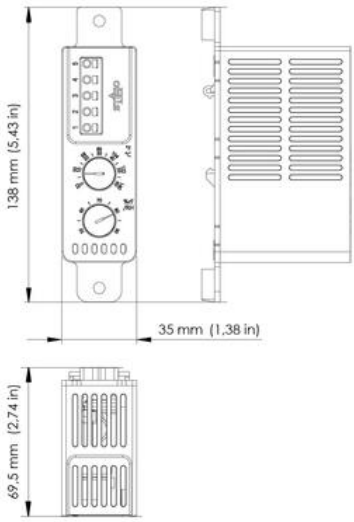

Connection diagram



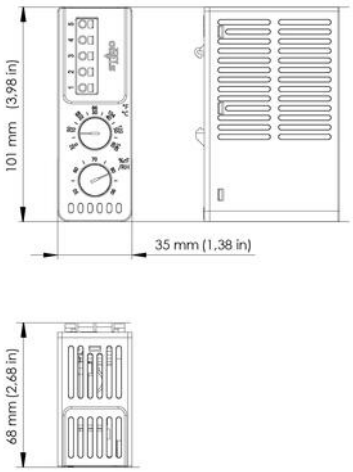

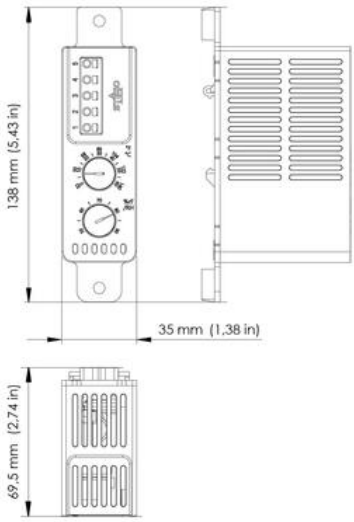

Connection diagram

