
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

DATALOGIC DE2011-DL ULTRA-COMPACT

1D/2D Ultra compact scan engine

DE2011-DL
DE2011 1D/2D Undecoded Scan Engine

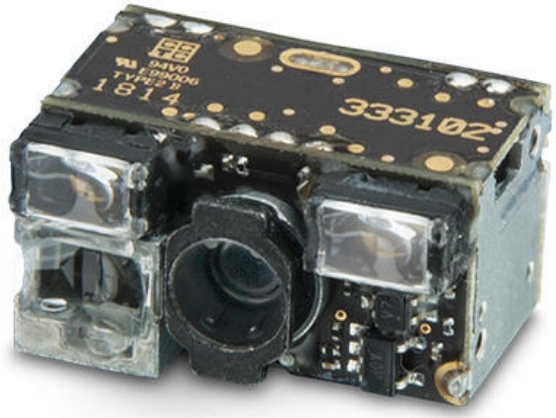

- Maximum resolution 0.195mm
- Humidity (Non-Condensing) 5-95%
- 21-pin ZIF connector interface
- Ambient light 0-100,000 lux

PRODUCT DESCRIPTION

The DE2011-DL is an ultra-compact high performance 2D imager engine, with an exceptional high-speed sensor enabling image capture at a full 60 frames per second.
Customers are able to connect the scan engine directly to their device by using the industry standard camera port on a 21-pin ZIF connctor. Using Datalogic Software Decoder for Engines (DSDE), customers can integrate the DE2011-DL OEM engine to their devide while working with the power of Datalogic decoding algorithms. The DSDE is available for Windows, WinCE, Linux and Android operating systems. Customers will have full control of the operation and function of the scan engine.
Where turnkey integration is needed, the compact size of these scan engines allows this into a wide array of application systems requiring barcodes to be read, these include customer-facing kiosks, medical test equipment, small-footprint sorting stations for merchandise or documents, anywhere a barcode needs to be ready and a standard scanner is not practical to be used.

Features:

- Depth of Field (DOF) reading
- A nominal field of view
- High motion tolerance
- Fast reading
- Excellent performance on decoding poorly printed bar codes or bar codes displayed on mobile devices and computer screens using patented Datalogic software
- Steady white illumination which is extreamly effective while easy on the user’s eyes.

TECHNICAL DATA

1D Code types	Auto discriminates all standard 1D codes
2D Code Types	Aztec Code, China Han Xin Code, Data Matrix, MaxiCode, Micro QR Code, QR Code
Approvals	RoHS
Dimension (mm)	11.4 x 21 x 15.75
Humidity	5 - 95% (Non-condensing)
Immunity to ambient light	0 - 100,000 lux
Interface	21-pin ZIF connector

Light source	Illumination: Steady White LED
Output current	<200 mA
Postal Code Types	China Post, IMB, KIX Post, Planet Code, Postnet, Royal Mail Code (RM4SCC), Australia Postal, Japan Postal, Korea Post
Readable code types	1D / Linear Codes, 2D Codes, Postal Codes, Stacked Codes
Reading angle window	Pitch:+/-60°; Tilt: +/-180°; Skew: +/-60°
Stacked Code Types	EAN/JAN Composites, GS1 Databar Composites, GS1 Databar Expanded Stacked, GS1 Databar Stacked, GS1 Databar Stacked Omnidirectional, Macro PDF, Micro PDF 417, PDF 417, UPC A/E Composites
Storage temperature max	70 °C
Storage temperature min	-40 °C
Temperature operational max	55 °C
Temperature operational min	-30 °C
Weight	9 g