OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

ENCLOSURE LIGHTING - SL 025

SL 025

02524.1-06
SL 025 PIR, 120V ac, USA/Canada socket, 15A, magnetic ** OBSOLETE **



- ** SOME ITEMS OUT GOING RANGE **
- ** SEE OBSOLETE LIST IN DOWNLOADS **
- Integrated outlet
- Low energy fluorescent lamp

PRODUCT DESCRIPTION

The Slimline is designed to take as little vertical space as possible and thus be concealed behind the cabinet's upper front edge. The risk for glare is thus minimal despite the 11 W low energy lamp providing as much light as a 75 W light bulb. Slimline has an integrated outlet for, for example, a soldering iron or other device, and as standard has a screw-mounted push button switch. Both a magnetic bracket and IR sensor are available as options. If a magnetic bracket is chosen, installation is very simple and the lamp can be easily moved around in the cabinet to suit each situation. If you would also prefer an IR sensor, it only reacts when the door is opened, even if the door is transparent. Installation is facilitated even more in that a door switch is unnecessary.

TECHNICAL DATA

GENERAL DATA

Mounting	Magnetic mount
Nominal voltage	120 V AC
Activation	IR sensor
Connection type	3-pole terminal
Socket	USA/CA
Nominal socket current	15 A
Light source	Low energy Fluorescent lamp
Luminance	900Lm
Life span	10,000 Hrs

DIMENSIONS

Length	345 mm

Width	345 mm
Height	40 mm

ELECTRICAL SPECIFICATION

Frequency	50/60 Hz


SAFETY & APPROVALS

IP class	IP20
Approvals	CE, EAC, GS, RoHS, UL, UL E234324
Flammability class	UL94-V0

MATERIALS - CONDITIONS

Material plastic housing	Plastic
Colour	Light grey
Operational temperature	-20°C ... +50°C
Storage temperature	-45°C ... +70°C
Operating humidity	< 90% RH
Humidity storage	<90% RH

Voltage min	120 V ac
Voltage max	120 V ac
Additional information	PIR sensor activates the light for 6 minutes
Weight	0.5 kg

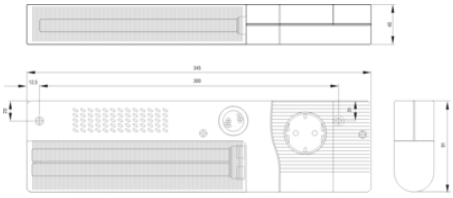



Uttag 5
USA, Kanada (CAN), etc.