**OEM Automatic Ltd**
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# ENCLOSURE LIGHTING - KL 025

KL 025

02501.0-00
KL 025 Lamp, 230V ac, 50Hz, France socket, magnetic - OBSOLETE



- ** OBSOLETE ** END OF LIFE 31/12/20
- Replaced by LED 121/122

### PRODUCT DESCRIPTION

The KL025 cabinet light is compactly designed especially for use in the cabinet. With the powerful magnetic mount, the lighting can easily be installed without any installation work anywhere in steel cabinet. Alternatively, it can be screw-mounted with 2 pieces of DIN (150-180 mm long) pieces inserted from the short sides. The integrated socket enables operation of other electrical auxiliary equipment.

Other voltages may be on request.

# TECHNICAL DATA

## GENERAL DATA

| | |
|---|---|
| **Mounting** | Magnetic mount |
| **Nominal voltage** | 230 V AC |
| **Activation** | Switch |
| **Connection type** | 3-pole terminal |
| **Socket** | FR/PL/CZ/SK |
| **Nominal socket current** | 16 A |
| **Light source** | Fluorescent lamp |
| **Luminance** | 900Lm |
| **Life span** | 5,000 hrs |

## DIMENSIONS

| | |
|---|---|
| **Length** | 355 mm |

| | |
|---|---|
| **Width** | 355 mm |
| **Height** | 70 mm |

## ELECTRICAL SPECIFICATION

| | |
|---|---|
| **Frequency** | 50 Hz |
| **Power consumption** | 11 W |


## SAFETY & APPROVALS

| | |
|---|---|
| **IP class** | IP20 |
| **Approvals** | CE, EAC, GS, RoHS |

## MATERIALS - CONDITIONS

| | |
|---|---|
| **Material plastic housing** | Plastic |
| **Colour** | Light grey |
| **Operational temperature** | -20°C ... +50°C |
| **Storage temperature** | -45°C ... +70°C |
| **Operating humidity** | < 90% RH |
| **Humidity storage** | <90% RH |

| | |
|---|---|
| **Voltage min** | 230 V ac |
| **Voltage max** | 230 V ac |
| **Weight** | 1 kg |

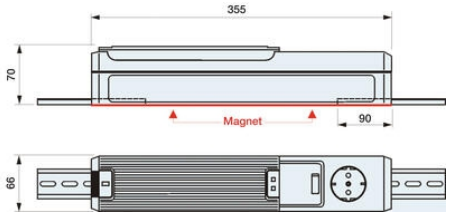




**Uttag 2**
Frankrike (FR), Polen (PL),
Tjeckien (CZ), Slovakien (SK), etc.