OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

ENCLOSURE LIGHTING - KL 025

KL 025

02502.0-00
KL 025 Lamp, 230V ac, 50Hz, Switzerland socket, magnetic - OBSOLETE



- ** OBSOLETE ** END OF LIFE 31/12/20
- Replaced by LED 121/122

PRODUCT DESCRIPTION

The KL025 cabinet light is compactly designed especially for use in the cabinet. With the powerful magnetic mount, the lighting can easily be installed without any installation work anywhere in steel cabinet. Alternatively, it can be screw-mounted with 2 pieces of DIN (150-180 mm long) pieces inserted from the short sides. The integrated socket enables operation of other electrical auxiliary equipment.

Other voltages may be on request.

TECHNICAL DATA

GENERAL DATA

Mounting	Magnetic mount
Nominal voltage	230 V AC
Activation	Switch
Connection type	3-pole terminal
Socket	CH
Nominal socket current	10 A
Light source	Fluorescent lamp
Luminance	900Lm
Life span	5,000 hrs

DIMENSIONS

Length	355 mm

Width	355 mm
Height	70 mm

ELECTRICAL SPECIFICATION

Frequency	50 Hz
Power consumption	11 W


SAFETY & APPROVALS


IP class	IP20
Approvals	CE, EAC, GS, RoHS

MATERIALS - CONDITIONS

Material plastic housing	Plastic
Colour	Light grey
Operational temperature	-20°C ... +50°C
Storage temperature	-45°C ... +70°C
Operating humidity	< 90% RH
Humidity storage	<90% RH

Voltage min	230 V ac
Voltage max	230 V ac
Weight	1 kg

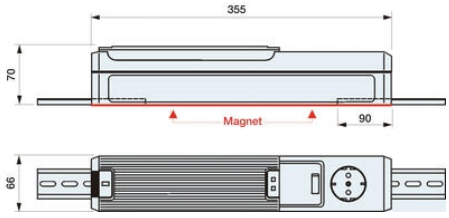



Uttag 3
Schweiz (CH), etc.