OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

ENCLOSURE LIGHTING LED 0255 MV RANGE

LED 025 Multi Wide Voltage LED Enclosure lamps

02552.0-11
LED 0255 MV Ecoline, Enclosure Lamp without switch, 24-240V Screw & Clip fixing, Pressure Spring terminal connection



- Multi-wide-range voltage (AC, DC)
- Durable and maintenance-free thanks to LED technology
- Daisy chain (up to 10 lights)
- On/off switch or motion detector
- Mounting kit for magnet, screw and clip fixing

PRODUCT DESCRIPTION

LED lights with Multi Wide Voltage are ideal for flexible use in enclosures and casings of different sizes. The Multi Wide Voltage supports both AC and DC voltages, ensuring maximum flexibility in the application. Fewer versions mean optimised processes in procurement and materials management. The mounting kit supplied also enables simple and versatile installation.

TECHNICAL DATA

GENERAL DATA

Mounting	Mounting brackets, Screw fixing
Nominal voltage	24-240 V AC/DC
Activation	No switch
Light source	LED

DIMENSIONS

Length	351 mm
Width	52 mm
Height	36 mm

ELECTRICAL SPECIFICATION

Power consumption	4.5 W


SAFETY & APPROVALS

Protection class	II (double insulated)
IP class	IP20
Approvals pending	CCC, EAC, UL E234324, VDE


MATERIALS - CONDITIONS

Material of body	Plastic
Colour	Transparent
Operational temperature	-40 till +60 °C
Storage temperature	-40 °C till 85 °C
Operating humidity	< 90 % RH
Humidity storage	< 90 % RH


Voltage max	265 V
Weight	0.2 kg
Life span	60.000 h vid+20 °C

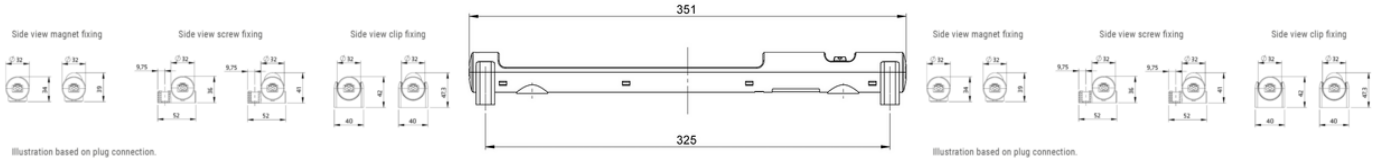


LED 025 multi wide voltage with clip fixing

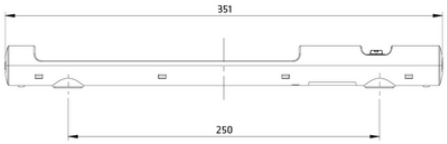

LED 025 multi wide voltage with magnet or screw fixing

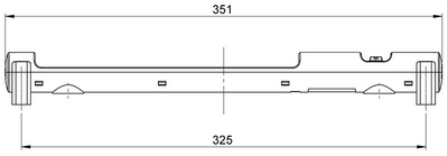

LED 025 multi wide voltage with clip fixing

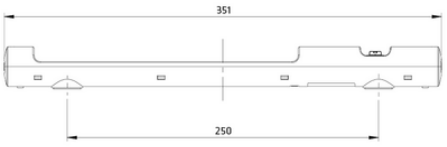

LED 025 multi wide voltage with magnet or screw fixing