OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

KES IP66 CABLE ENTRY WITH STRAIN RELIEF

Cable Entry System - KES, KES-R

28636.4
KES 21/24, Screw Mount Cable Entry, 21 max, Black



- For cable, pipe & hose diameters 3.2mm to 20.5mm
- Double Sealing to IP66
- Polymide 6.6 Glass fibre reinforced core
- Hygienic design for wash down - Ecolab approved
- Integrated strain relief to EN62444

PRODUCT DESCRIPTION

The KES cable entry system allows unassembled cables,or pneumatic hoses to be quickly inserted into switchgear cabinets or machine housings without the use of tools.
The KES entry plates feature a dimensionally stable & ridged, elastomer-encapsulated glass fibrereinforced polyamide frame.

There are 3 different mounting options; external screw-on outer mount, internal screw mount using threaded bushes from the inside, or snap on without screws.

To insert the required number of cables, the surface membrane is first pierced with a small screwdriver. Then the unassembled cables, hoses or pipes can be easily pushed through the plate. The special construction of the double sealed conical grommets on the back of the plate provides IP66 sealing and reliable strain relief in accordance to DIN EN 62444.

With up to 32 cables per plate (with various diameters from 3.2 to 20.5 mm), the KES is ideal for confined spaces and achieves a significantly higher packaging density than conventional entry systems such as skin top glands.

The KES is designed to use the same mounting cut-outs as the standard 24-pin industrial connectors, such as Harting & Walther, so can be easily retro-fitted.
All variants are UL approved and available in grey or black, the polyamide core and the TPE membrane conform to UL 94 V-0 classification.

TECHNICAL DATA

GENERAL DATA

Type	KES
Mounting	Screw on

Colour	Black
IP class	IP66
NEMA class	4x
Number of cables	21
Number of cables x cable diameter	1 x 3.2mm-6.3mm, 2 x 8.0mm-12.5mm, 14 x 4.0mm-7.5mm, 4 x 5.5mm-10.5mm
Length	1496 mm
Width	58 mm
Installed height	145 mm

MOUNTING DETAILS

Wall thickness	N/A
Length of cutout	112 mm
Width of cutout	36 mm
Number of screw holes	4
Diameter of the screw holes	55 mm
Fixing screws	M5
Torque of the fixing screws	3

MATERIALS

Material	Polyamide 6.6
Glass-fibre reinforced	Yes
Flammability class	V-0
Sealing material	TPE
Silicone-free	Yes
Halogen-free	Yes
Operating temperature from	-40 °C
Operating temperature to	90 °C

APPROVALS

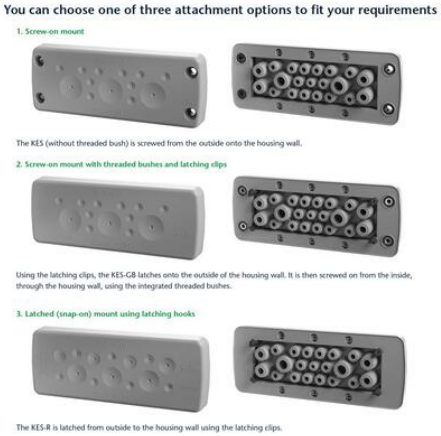
UL test standard	UL 508A
cUL test standard	C22.2 No. 14-18

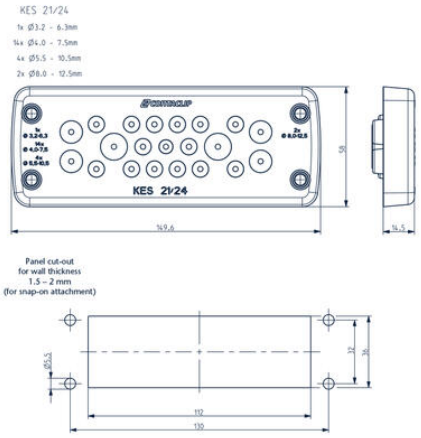
ADDITIONAL DATA

Tariff code	39259020
Country of origin	DE
Weight	80 g

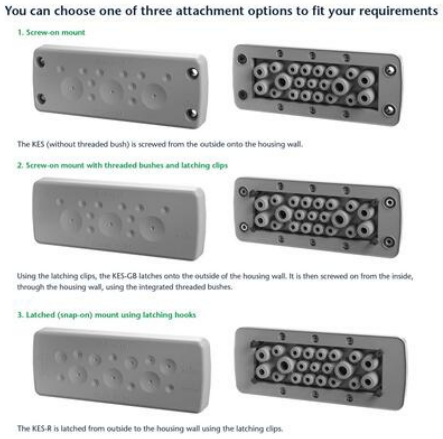
Pack size	10




You can choose one of three attachment options to fit your requirements
1. Screw-on mount
The KES (without threaded bush) is screwed from the outside onto the housing wall.
2. Screw-on mount with threaded bushes and latching clips
Using the latching clips, the KES-GB latches onto the outside of the housing wall. It is then screwed on from the inside, through the housing wall, using the integrated threaded bushes.
3. Latched (snap-on) mount using latching hooks
The KES-R is latched from outside to the housing wall using the latching clips.


KES 21/24
1x Ø3.2 - 6.3mm
14x Ø4.0 - 7.5mm
4x Ø5.5 - 10.5mm
2x Ø8.0 - 12.5mm
KES 21/24
58
49,6
14,5

Panel cut-out
for wall thickness
1,5 – 2 mm
(for snap-on attachment)
Ø5,5
32
36
112
130


You can choose one of three attachment options to fit your requirements
1. Screw-on mount
The KES (without threaded bush) is screwed from the outside onto the housing wall.
2. Screw-on mount with threaded bushes and latching clips
Using the latching clips, the KES-GB latches onto the outside of the housing wall. It is then screwed on from the inside, through the housing wall, using the integrated threaded bushes.
3. Latched (snap-on) mount using latching hooks
The KES-R is latched from outside to the housing wall using the latching clips.