
OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

KDSI-SR-G INVERTED CABLE ENTRY SYSTEM WITH SPLIT FRAME

KDSI-SR-G Split Frame Cable Entry System

29102.4
KDSI-SR-G 8/16 , IP66 Split Frame Cable Entry System
up to 8 inserts

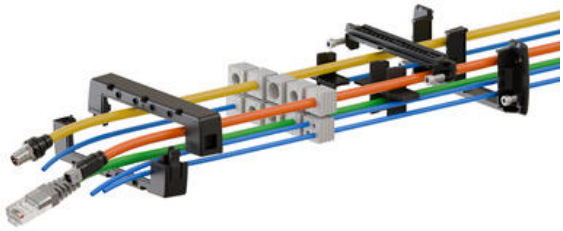

- Quick and easy installation
- Installation and assembly from one mounting direction
- No screws required to hold frame halves together
- Modular System for maximum flexibility
- IP66

PRODUCT DESCRIPTION

The KDSI-SR-G is the latest edition to the growing range of Cable Management Systems. The innovative split frame is quick and easy to assemble without the need to screw the frame together before mounting. The top section simply clicks together with a dove tail clip while still maintaining the IP66 protection class. All mounting and cable entries can be done from the outside, so is ideal for applications where space inside the panel is limited. They can hold all types of cables in place even those without connectors.
The KDSI-SR-G cable entry system can fit cut outs for 4-24-pole heavy duty connectors.

TECHNICAL DATA

GENERAL DATA

Mounting	Screw
Colour	Black
IP class	IP66
Length	126 mm
Width	64 mm
Height	24.2 mm

Installed height	24.2 mm

MOUNTING DETAILS

Length of cutout	86 mm
Width of cutout	36 mm
Number of screw holes	4
Diameter of the screw holes	5.5 mm
Fixing screws	M5
Torque of the fixing screws	3

MATERIALS

Glass-fibre reinforced	Yes
Flammability class	V-0
Sealing material	TPE
Silicone-free	Yes
Halogen-free	Yes
Operating temperature from	-40 °C
Operating temperature to	120 °C

ADDITIONAL DATA

Tariff code	39259020
Country of origin	DE
Pack size	1



