


## KDSI-SR-G INVERTED CABLE ENTRY SYSTEM WITH SPLIT FRAME

### KDSI-SR-G

29102.4  
KDSI-SR-G 8/16 BK

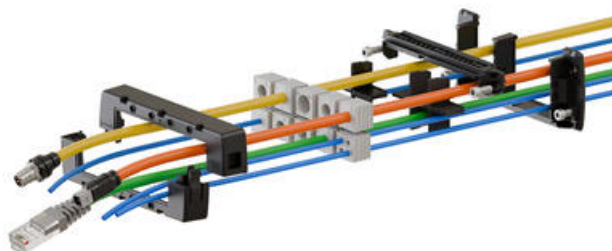

- Maximum flexibility in the installation sequence
- Installation and assembly from one mounting direction
- No screws required to hold frame halves together
- Optimised Warehousing

### PRODUCT DESCRIPTION

The inverted KDSI-SR-G frames allow for interior assembly from the outside. This is ideal for applications where space inside the panel is limited. They can hold all types of cables in place even those without connectors.

The front and back of the frame have a screw connection whereas the top and bottom connect with a secure dovetail clip that follows the standards of an IP66 protection rating.

The KDSI-SR-G cable entry system can fit cut outs for 4-24-pole heavy duty connectors.

## TECHNICAL DATA

### GENERAL DATA

Mounting	Screw
Colour	Black
IP class	IP66
Length	126 mm
Width	64 mm
Height	24.2 mm
Installed height	24.2 mm

### MOUNTING DETAILS

Length of cutout	86 mm
Width of cutout	36 mm
Number of screw holes	4
Diameter of the screw holes	5.5 mm
Fixing screws	M5
Torque of the fixing screws	3

### MATERIALS

Glass-fibre reinforced	Yes
Flammability class	V-0
Sealing material	TPE
Silicone-free	Yes
Halogen-free	Yes
Operating temperature from	-40 °C
Operating temperature to	120 °C

**ADDITIONAL DATA**

Tariff code	39259020
Country of origin	DE
Pack size	1