OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

KES-R M CONE LATCHING AND SCREW MOUNT CABLE ENTRY

KES-R M Cone Cable Entry

28926.6
KES-R M32/K, M32 Cone Cable Entry for cables from 4mm to 18mm dia, IP54/IP66



- Snap-on (IP54) and Screw-on (IP66)
- High flexibility
- Polyamide PA 6.6, glass-fibre reinforced with TPE
- Increased strain relief
- Simple assembly


PRODUCT DESCRIPTION


The KES-R M Cone cable entries, with CONTA-CLIP's distinctive do decagon design, are snapped directly from the outside onto a round cut-out from M25 to M63 for panel a thickness of 1mm to 2.5mm and will give you an IP54 Cable Entry.
If the wall is thicker (up to 11mm) , or if you need a tighter seal up to protection class IP66, then you can also use a locknut to secure the entries from the inside of the panel. The assembly takes just seconds.
Determine the cable diameter and open the cable entry with a clean cut. KES-R M Cone must be opened in such a way that the diameter marking specified on the cone steps matches the cable to be routed and remains visible.









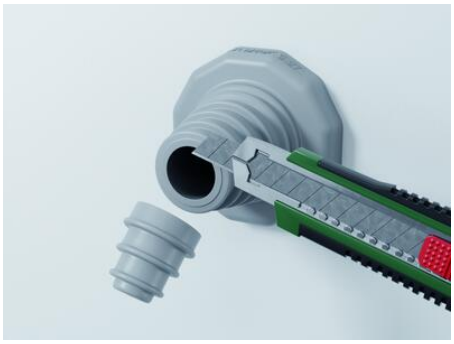

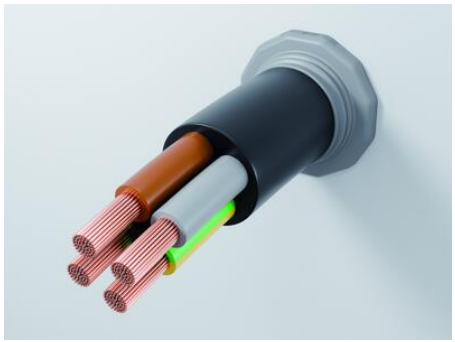

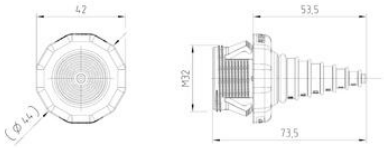
4.2
(Ø 4.4)
53.5
M32
73.5

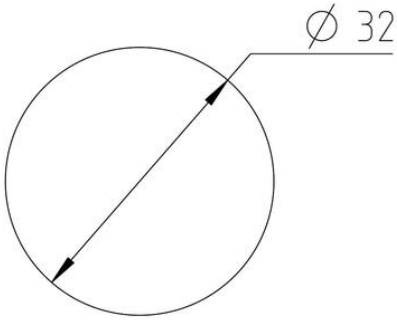
Ø 32







