**OEM Automatic Ltd**
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# KES-R M CONE LATCHING AND SCREW MOUNT CABLE ENTRY

KES-R M Cone Cable Entry

28928.6
KES-R M50/K, M50 Cone Cable Entry for cables from 18 to 37mm dia , IP54/IP66



- Snap-on (IP54) and Screw-on (IP66)
- High flexibility
- Polyamide PA 6.6, glass-fibre reinforced with TPE
- Increased strain relief
- Simple assembly


## PRODUCT DESCRIPTION


The KES-R M Cone cable entries, with CONTA-CLIP's distinctive do decagon design, are snapped directly from the outside onto a round cut-out from M25 to M63 for panel a thickness of 1mm to 2.5mm and will give you an IP54 Cable Entry.
If the wall is thicker (up to 11mm) , or if you need a tighter seal up to protection class IP66, then you can also use a locknut to secure the entries from the inside of the panel. The assembly takes just seconds.
Determine the cable diameter and open the cable entry with a clean cut. KES-R M Cone must be opened in such a way that the diameter marking specified on the cone steps matches the cable to be routed and remains visible.








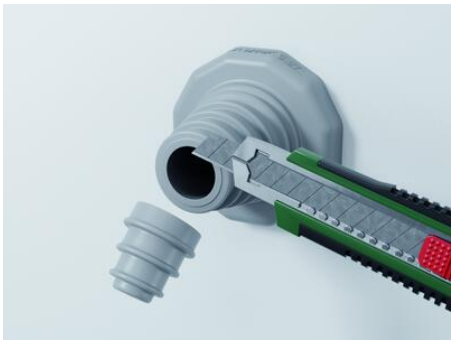

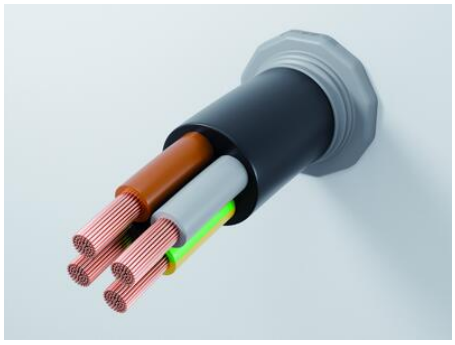

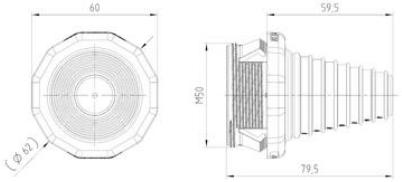
60
59,5
M59
(Ø 62)
79,5







