

## **OEM Automatic Ltd**

Address: Whiteacres, Whetstone Leicester, LE8 6ZG 0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

## **IDEM KLP LOCKING SWITCH**

201401HF KLP M20 24v (lid release) - HF actuator

- Electric release
- 8 key entry positions
- 2 x LED indicator
- Locking force up to 1800 N
- Slim housing 46 mm x 160 mm





## PRODUCT DESCRIPTION

Locking switch with locking SEZYLOCK KLP, made of plastic (polyester), with locking force up to 1800N. The breaker head is made of stainless steel. The switch has 2 LEDs that show the status of the solenoid and the state of the blockage. It also has a rotatable head, which provides 8 key entry positions for easy and flexible mounting. The KLP switch has a standard distance between the fixing holes - 30 mm.


In the event of a voltage drop, the switch can be opened in an emergency without any special keys. The switch is available in the version: voltage release.

## **TECHNICAL DATA**


| Actuator              | Heavy duty flexible  |  |  |
|-----------------------|--|--|--|
| Annual usage          | 8 cycles per hour/24 hours per day/365 days  |  |  |
| Approvals             | ISO 13849-1, ISO 14119, EN60204-1, EN62061, EN60947-5-1, UL 508  |  |  |
| Conduit entry         | M20  |  |  |
| Contact type          | 2NC safety circuits: solenoid/lock and actuator/guard wired in series, 1NO auxiliary circuit: for indication of actuator status, 1NO auxiliary circuit: for lock status (selectable with LED2) |  |  |
| Contacts              | 2NC 2NO  |  |  |
| Head material         | Stainless steel 316  |  |  |
| Holding force (F1Max) | 2000 N   |  |  |
| Housing material      | Polyester  |  |  |
| IP class              | IP67   |  |  |
| LED indication        | LED1 status of solenoid, LED2 status of lock   |  |  |
| LED supply voltage    | 24Vdc  |  |  |
|                       |  |  |  |


| Manual operation                    | Manual release lid only                        |  |  |
|-------------------------------------|--|--|--|
| Maximum approach / withdrawal speed | 600 mm/s                                       |  |  |
| Mechanical reliability B10d         | 2.5 x 10 <sup>6</sup> operations at 100mA load |  |  |
| Mounting                            | 4 x M5   |  |  |
| MTTFd                               | 356 years                                      |  |  |
| Operating temperature               | -2550°C  |  |  |
| PFHd                                | 3.44 x 10 <sup>-8</sup>                        |  |  |
| PL                                  | e acc. ISO13849-1                              |  |  |
| Rated insulation voltage            | 600V ac  |  |  |
| SIL                                 | 3 acc. EN62061                                 |  |  |
| Solenoid Voltage                    | 24V ac/dc                                      |  |  |
| Thermal current (Ith)               | 5 A  |  |  |
| Travel for positive opening         | 10 mm  |  |  |
| Utilisation category                | AC15, A300, 3 A                                |  |  |
| Withstand voltage                   | 2500V ac                                       |  |  |









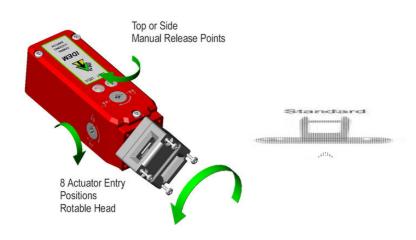

























|       | 6.0 5 | .0   | 0mm |
|-------|-------|------|-----|
| 11/12 | Open  |      |     |
| 21/22 | Open  |      |     |
| 33/34 |       | Open |     |
| 43/44 |       | Open | _   |