OEM Automatic Ltd

Address: Whiteacres, Whetstone Leicester, LE8 6ZG 0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

IDEM KLP LOCKING SWITCH

201307 KLP M20 230v (no release)

- Electric release
- 8 key entry positions
- 2 x LED indicator
- Locking force up to 1800 N
- Slim housing 46 mm x 160 mm





PRODUCT DESCRIPTION

Locking switch with locking SEZYLOCK KLP, made of plastic (polyester), with locking force up to 1800N. The breaker head is made of stainless steel. The switch has 2 LEDs that show the status of the solenoid and the state of the blockage. It also has a rotatable head, which provides 8 key entry positions for easy and flexible mounting. The KLP switch has a standard distance between the fixing holes - 30 mm.

In the event of a voltage drop, the switch can be opened in an emergency without any special keys. The switch is available in the version: voltage release.

TECHNICAL DATA


Actuator	Not included	
Annual usage	8 cycles per hour/24 hours per day/365 days	
Approvals	ISO 13849-1, ISO 14119, EN60204-1, EN62061, EN60947-5-1, UL 508	
Conduit entry	M20	
Contact type	2NC safety circuits: solenoid/lock and actuator/guard wired in series, 1NO auxiliary circuit: for indication of actuator status, 1NO auxiliary circuit: for lock status (selectable with LED2)	
Contacts	2NC 2NO	
Head material	Stainless steel 316	
Holding force (F1Max)	2000 N	
Housing material	Polyester	
IP class	IP67	
LED indication	LED1 status of solenoid, LED2 status of lock	
LED supply voltage	24Vdc	
LED supply voltage	24Vdc	


Manual operation	No manual release fitted (blanked)	
Maximum approach / withdrawal speed	600 mm/s	
Mechanical reliability B10d	2.5 x 10 ⁶ operations at 100mA load	
Mounting	4 x M5	
MTTFd	356 years	
Operating temperature	-2550°C	
PFHd	3.44 x 10 ⁻⁸	
PL	e acc. ISO13849-1	
Rated insulation voltage	600V ac	
SIL	3 acc. EN62061	
Solenoid Voltage	230V ac	
Thermal current (Ith)	5 A	
Travel for positive opening	10 mm	
Utilisation category	AC15, A300, 3 A	
Withstand voltage	2500V ac	









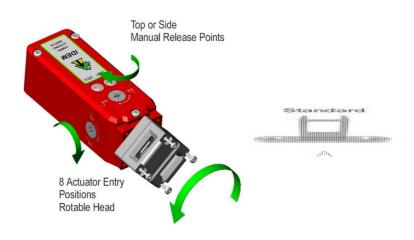


























	6.0 5	.0	0mm
11/12	Open		
21/22	Open		
33/34		Open	
43/44		Open	_