## **OEM Automatic Ltd**

Address: Whiteacres, Whetstone Leicester, LE8 6ZG 0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

## **IDEM KLP LOCKING SWITCH**

201402HFH KLP ½NPT 24v (lid release) - HFH actuator

- Electric release
- 8 key entry positions
- 2 x LED indicator
- Locking force up to 1800 N
- Slim housing 46 mm x 160 mm





## PRODUCT DESCRIPTION

Locking switch with locking SEZYLOCK KLP, made of plastic (polyester), with locking force up to 1800N. The breaker head is made of stainless steel. The switch has 2 LEDs that show the status of the solenoid and the state of the blockage. It also has a rotatable head, which provides 8 key entry positions for easy and flexible mounting. The KLP switch has a standard distance between the fixing holes - 30 mm.


In the event of a voltage drop, the switch can be opened in an emergency without any special keys. The switch is available in the version: voltage release.

## **TECHNICAL DATA**


Actuator	Heavy duty s/steel		
Annual usage	8 cycles per hour/24 hours per day/365 days		
Approvals	ISO 13849-1, ISO 14119, EN60204-1, EN62061, EN60947-5-1, UL 508		
Conduit entry	1/2" NPT		
Contact type	2NC safety circuits: solenoid/lock and actuator/guard wired in series, 1NO auxiliary circuit: for indication of actuator status, 1NO auxiliary circuit: for lock status (selectable with LED2)		
Contacts	2NC 2NO		
Head material	Stainless steel 316		
Holding force (F1Max)	2000 N		
Housing material	Polyester		
IP class	IP67		
LED indication	LED1 status of solenoid, LED2 status of lock		
LED supply voltage	24Vdc		


Manual operation	Manual release lid only		
Maximum approach / withdrawal speed	600 mm/s		
Mechanical reliability B10d	2.5 x 10 <sup>6</sup> operations at 100mA load		
Mounting	4 x M5		
MTTFd	356 years		
Operating temperature	-2550°C		
PFHd	3.44 x 10 <sup>-8</sup>		
PL	e acc. ISO13849-1		
Rated insulation voltage	600V ac		
SIL	3 acc. EN62061		
Solenoid Voltage	24V ac/dc		
Thermal current (Ith)	5 A		
Travel for positive opening	10 mm		
Utilisation category	AC15, A300, 3 A		
Withstand voltage	2500V ac		









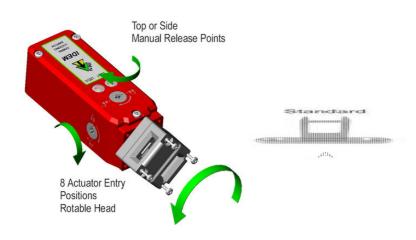

























	6.0 5	.0	0mm
11/12	Open		
21/22	Open		
33/34		Open	
43/44		Open	_