OEM Automatic Ltd

Address: Whiteacres, Whetstone Leicester, LE8 6ZG 0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

IDEM KLM-P2L LOCKING SWITCH

202024-SS KLM-P2L M20 110V SS Head

- Electric locking
- 8 key entry positions
- · LED indicator
- Locking force up to 2000 N
- Completely metal





PRODUCT DESCRIPTION

Locking switch with locking system SAMOCK-KLM-P2L, made of cast metal, with locking force up to 2000N. The switch is completely metal and, as an option, is also available with a head made of stainless steel. The switch has 1 LED, which shows the status of the solenoid. It also has a rotatable head, which provides 8 key entry positions for easy and flexible mounting.


The KLM-P2L breaker has a standard distance between the fixing holes - 30 mm.


The switch is available in the version: voltage locking.


TECHNICAL DATA

Actuator	Not included	
Annual usage	8 cycles per hour/24 hours per day/365 days	
Approvals	ISO 13849-1, ISO 14119, EN60204-1, EN62061, EN60947-5-1, UL 508	
Conduit entry	M20	
Contact type	2NC safety circuits, 1NC 1NO auxiliary circuits - actuator/door status	
Contacts	3NC 1NO	
Head material	Die cast metal	
Holding force (F1Max)	3000 N	
Housing material	Die cast metal	
IP class	IP67	
LED indication	LED status of solenoid power	
Maximum approach / withdrawal speed	600 mm/s	
Mechanical reliability B10d	2.5 x 10 ⁶ operations at 100mA load	

Mounting	4 x M5	
MTTFd	356 years	
Operating temperature	-2540°C	
PFHd	3.44 x 10 ⁻⁸	
PL	e acc. ISO13849-1	
Rated insulation voltage	600V ac	
SIL	3 acc. EN62061	
Solenoid Voltage	110V ac	
Thermal current (Ith)	5 A	
Travel for positive opening	10 mm	
Utilisation category	AC15, A300, 3 A	
Withstand voltage	2500V ac	

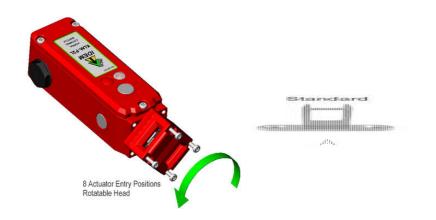


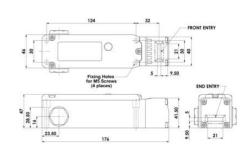


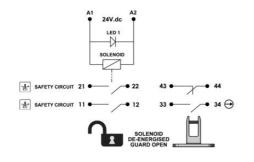

	0.0	5.0
11/12	Open	Solenoid Energised
21/22	Open	Solenoid Energised
33/34	Open	Tongue Inserted
43/44	Op	oen Tongue Inserted



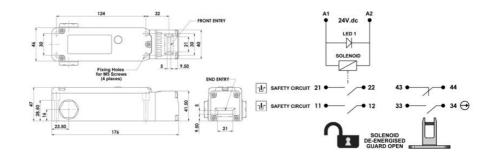



	6	.0 5.0	0mm
11/12	Open		Solenoid Energised
21/22	Open Open		Solenoid Energised
33/34			Tongue Inserted
43/44		Open	Tongue Inserted