

IDEM KLTM LOCKING SWITCH

450006HF KLTM (Mechanical Only) QC M23 110v - HF Actuator

- Electric release
- 4 key entry positions
- 2 x LED indicator
- Locking force up to 2000 N
- Dimensions 105 mm x 150 mm





PRODUCT DESCRIPTION


Locking switch with RAMZLOCK KLTM locking, made of cast metal, with locking force up to 2000N. The breaker head is made of stainless steel. The switch has 2 LEDs that show the status of the solenoid and the state of the blockage. It also has a rotatable head, which provides 4 key entry positions for easy and flexible mounting. The KLTM switch has a standard spacing between the mounting holes - 73 mm.


In the event of a voltage drop, the switch can be opened in an emergency without any special keys. The switch is available in the version: voltage release.

TECHNICAL DATA

| Actuator | Heavy duty flexible |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Annual usage | 8 cycles per hour/24 hours per day/365 days |
| Approvals | ISO 13849-1, ISO 14119, EN60204-1, EN62061, EN60947-5-1, UL 508 |
| Conduit entry | M23 12 Pole |
| Contact type | 4NC safety contacts, 1NO auxiliary contact (guard open), 1NO auxiliary contact (guard locked) (selectable option for LED2 guard locked) |
| Contacts | 4NC 2NO |
| Head material | Stainless steel 316 |
| Holding force (F1Max) | 3000 N |
| Housing material | Die cast metal |

| IP class | IP67 |
|-------------------------------------|--------------------------------------------------------------------|
| LED indication | LED1 red solenoid power on, LED2 green switch locked (if selected) |
| Manual operation | Standard manual release lid and side |
| Maximum approach / withdrawal speed | 600 mm/s |
| Mechanical reliability B10d | 2.5 x 10 ⁶ operations at 100mA load |
| Mounting | 2 x M5 |
| MTTFd | 356 years |
| Operating temperature | -2540°C |
| PFHd | 3.44 x 10⁻ ^в |
| PL | e acc. ISO13849-1 |
| Rated insulation voltage | 600V ac |
| SIL | 3 acc. EN62061 |
| Solenoid Voltage | 110V ac |
| Thermal current (Ith) | 5 A |
| Travel for positive opening | 10 mm |
| Utilisation category | AC15, A300, 3 A |
| Withstand voltage | 2500V ac |

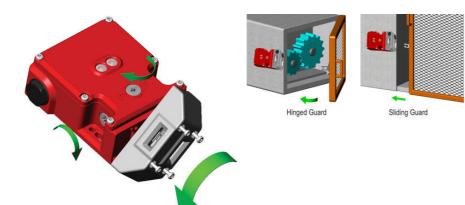


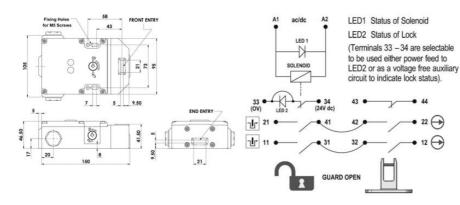


| | 6.0 5 | .0 | 0mm |
|-------|-------|------|-----|
| 11/12 | Open | | |
| 21/22 | Open | | |
| 33/34 | | Open | |
| 43/44 | | Open | |

Statimetaned


1

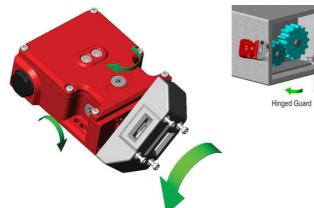







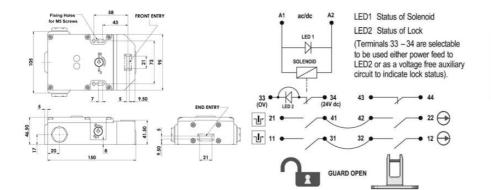

| 11/12 | Open | |
|-------|------|------|
| 21/22 | Open | |
| 33/34 | | Open |
| 43/44 | | Open |

0mm