OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

MRI MONITORING RELAYS

MRI11/UC12-48V
Current Relay 1 Phase 12-48V ac/dc

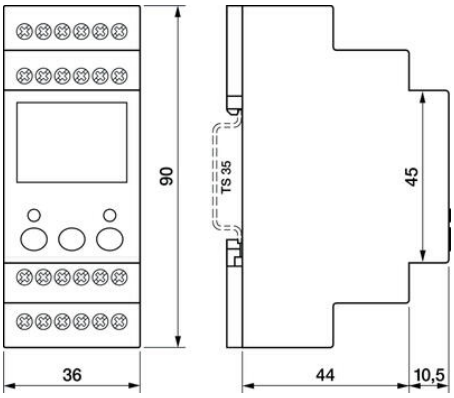


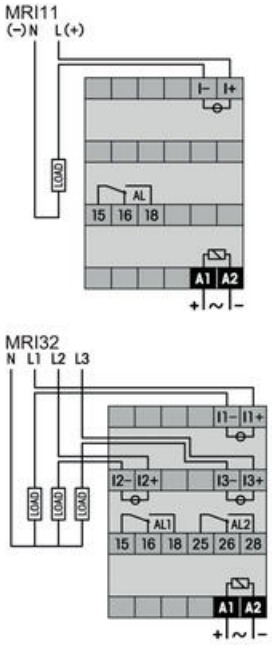
PRODUCT DESCRIPTION

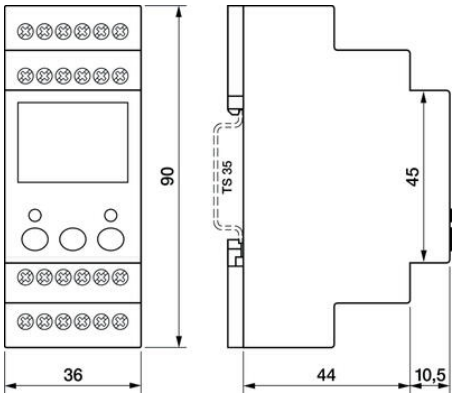
TECHNICAL DATA


Approvals	CE, RoHS
Breaking Voltage	250 V
Contact material	AgNi
Inrush max	15 A
IP class	IP20
Measurement range	0,1-5A
Nominal current	6 A
Number of contacts	1
Power consumption	1.6 W
Recommended tightening torque	0.4
Storage temperature max	85 °C
Storage temperature min	-40 °C
Temperature operational max	60 °C
Temperature operational min	-40 °C
Voltage ac/dc max	48 V
Voltage ac/dc min	12 V


Weight	107 g


90
TS 35
45
36
44
10,5


MRI11
(–)N L(+)
I– I+
LOAD
AL
15 16 18
A1 A2
+ ~ –
MRI32
N L1 L2 L3
I1– I1+
I2– I2+ I3– I3+
LOAD
AL1 AL2
15 16 18 25 26 28
A1 A2
+ ~ –


90
TS 35
45
36
44
10,5


MRI11
(–)N L(+)
I– I+
LOAD
AL
15 16 18
A1 A2
+ ~ –


MRI32
N L1 L2 L3
I1– I1+
I2– I2+ I3– I3+
LOAD
AL1 AL2
15 16 18 25 26 28
A1 A2
+ ~ –