

INSULATED BOOTLACE FERRULE FOR DUAL CABLES

V30AE000606

0.75mm² x 8mm Dual Ferrule - White

- Funnel feed-in made of polypropylene
- Heat resistant up to 120 °C
- For wires from 0.5...16 mm²
- Material: E-Cu/A-Cu, galvanically tin-plated



PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Colour	White
Cross section max	0.75 mm ²
Rated wire cross section to (AWG)	18
Standard	German Standard

DIMENSIONS

Length	14 mm
Length of tube	8 mm
Stripping length	11 mm
Thickness of collar	0.3 mm
Thickness of tube	0.15 mm
Diameter of tube	1.7 mm

MATERIALS

Conductor tube	Copper alloy
Contact surface	Galvanic tin-plated, shiny
Plastic collar	Polypropylene-homopolymer


Operating temperature from	-5 °C
Operating temperature to	105 °C

APPROVALS


DIN 46228-4:1990	Yes
DIN 46228-1:1992	No

ADDITIONAL DATA

Tariff code	85369010
Country of origin	DE
Weight	0.14 g
Pack size	500

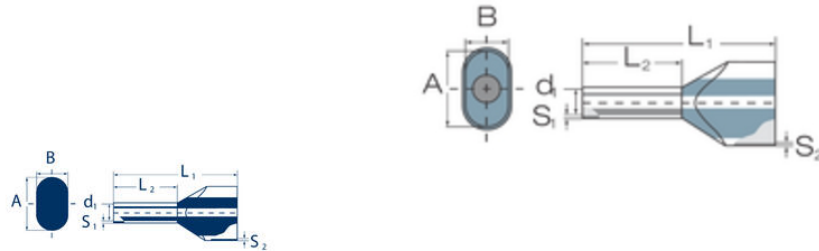

Bezeichnung Description	AWG	Fabcode/Bestell-Nr. Order code/Order No.			Nennmaße mm Dimensions mm						Stück Pieces		
neef	L ₁	Typ Type	Zuf	DIN	WGS	L ₁	d ₁	d ₂	S ₁	S ₂	A	B	VPE
2 x 0.34 8 N 2 x 20			V04AE00554	V04AE00554		10	8	1.2	0.15	0.25	0.5	2	500
2 x 0.8 8 N 2 x 20			V04AE00134	V04AE00134	V04AE00146	10	8	1.4	0.15	0.3	0.5	2	500
2 x 0.8 10 HL 2 x 20			V04AE00138	V04AE00148	V04AE00146	10	10	1.4	0.15	0.3	0.5	2	500
2 x 0.8 12 L 2 x 20			V04AE00138	V04AE00147	V04AE00147	10	12	1.4	0.15	0.3	0.5	2	500
2 x 0.75 8 N 2 x 18			V04AE00555	V04AE00557	V04AE00376	10	8	1.7	0.15	0.3	0.5	2	500
2 x 0.75 10 HL 2 x 18			V04AE00713	V04AE00714	V04AE00717	10	10	1.7	0.15	0.3	0.5	2	500
2 x 0.75 12 HL 2 x 18			V04AE00826	V04AE00827	V04AE00829	10	12	1.7	0.15	0.3	0.5	2	500
2 x 0.75 18 L 2 x 18			V04AE00740	V04AE00741	V04AE00738	24	18	1.7	0.15	0.3	0.5	2	500
2 x 1 8 N 2 x 18			V04AE00006	V04AE00009	V04AE00009	15	8	2	0.15	0.3	0.6	3.2	500
2 x 1 12 HL 2 x 18			V04AE00728	V04AE00728	V04AE00726	15	12	2	0.15	0.3	0.6	3.2	500
2 x 1 14 HLB 2 x 18			V04AE00855	V04AE00854	V04AE00854	21	14	2	0.15	0.3	0.6	3.2	500
2 x 1 18 L 2 x 18			V04AE00743	V04AE00743	V04AE00743	26	18	2	0.15	0.3	0.6	3.2	500
2 x 1.5 8 N 2 x 18			V04AE00521	V04AE00525	V04AE00525	15	8	2.2	0.15	0.3	0.6	3.0	500
2 x 1.5 12 HL 2 x 18			V04AE00718	V04AE00718	V04AE00718	20	12	2.2	0.15	0.3	0.6	3.0	500
2 x 1.5 18 L 2 x 18			V04AE00744	V04AE00745	V04AE00745	26	18	2.2	0.15	0.3	0.6	3.0	500
2 x 2.5 10 N 2 x 14			V04AE00001	V04AE00001	V04AE00001	16	10	2.8	0.2	0.4	0.4	4.0	500
2 x 2.5 12 HL 2 x 14			V04AE00748	V04AE00748	V04AE00748	21	12	2.8	0.2	0.4	0.4	4.0	500
2 x 2.5 18 L 2 x 14			V04AE00750	V04AE00750	V04AE00747	27	18	2.8	0.2	0.4	0.4	4.0	500
2 x 4 12 N 2 x 12			V04AE00749	V04AE00749	V04AE00748	22	12	3.8	0.2	0.5	0.5	5.0	500
2 x 4 18 L 2 x 12			V04AE00749	V04AE00749	V04AE00749	28	18	3.8	0.2	0.5	0.5	5.0	500
2 x 6 12 N 2 x 10			V04AE00749	V04AE00749	V04AE00749	23	12	4.8	0.3	0.5	0.4	6.2	500
2 x 6 18 L 2 x 10			V04AE00749	V04AE00749	V04AE00749	29	18	4.8	0.3	0.5	0.4	6.2	500
2 x 9 12 N 2 x 8			V04AE00749	V04AE00749	V04AE00749	24	12	5.8	0.2	0.5	0.4	7.0	500
2 x 10 12 L 2 x 8			V04AE00749	V04AE00749	V04AE00749	30	10	5.8	0.2	0.5	0.4	7.0	500
2 x 16 18 N 2 x 8			V04AE00749	V04AE00749	V04AE00749	29	16	8.3	0.3	0.6	0.4	7.0	500
2 x 18 25 L 2 x 8			V04AE00749	V04AE00749	V04AE00749	38	25	8.3	0.3	0.6	0.4	7.0	500

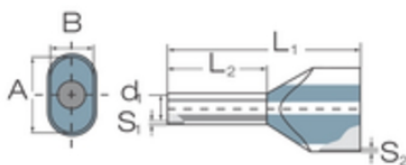

Bezeichnung Description	AWG	Fabcode/Bestell-Nr. Order code/Order No.			Nennmaße mm Dimensions mm						Stück Pieces		
neef	L ₁	Typ Type	Zuf	DIN	WGS	L ₁	d ₁	d ₂	S ₁	S ₂	A	B	VPE
2 x 0.34 8 N 2 x 20			V04AE00554	V04AE00554		10	8	1.2	0.15	0.25	0.5	2	500
2 x 0.8 8 N 2 x 20			V04AE00134	V04AE00148	V04AE00146	10	8	1.4	0.15	0.3	0.5	2	500
2 x 0.8 10 HL 2 x 20			V04AE00138	V04AE00148	V04AE00146	10	10	1.4	0.15	0.3	0.5	2	500
2 x 0.8 12 L 2 x 20			V04AE00138	V04AE00147	V04AE00147	10	12	1.4	0.15	0.3	0.5	2	500
2 x 0.75 8 N 2 x 18			V04AE00555	V04AE00557	V04AE00376	10	8	1.7	0.15	0.3	0.5	2	500
2 x 0.75 10 HL 2 x 18			V04AE00713	V04AE00714	V04AE00717	10	10	1.7	0.15	0.3	0.5	2	500
2 x 0.75 12 HL 2 x 18			V04AE00826	V04AE00827	V04AE00829	10	12	1.7	0.15	0.3	0.5	2	500
2 x 0.75 18 L 2 x 18			V04AE00740	V04AE00741	V04AE00738	24	18	1.7	0.15	0.3	0.5	2	500
2 x 1 8 N 2 x 18			V04AE00006	V04AE00009	V04AE00009	15	8	2	0.15	0.3	0.6	3.2	500
2 x 1 12 HL 2 x 18			V04AE00728	V04AE00728	V04AE00726	15	12	2	0.15	0.3	0.6	3.2	500
2 x 1 14 HLB 2 x 18			V04AE00855	V04AE00854	V04AE00854	21	14	2	0.15	0.3	0.6	3.2	500
2 x 1 18 L 2 x 18			V04AE00743	V04AE00743	V04AE00743	26	18	2	0.15	0.3	0.6	3.2	500
2 x 1.5 8 N 2 x 18			V04AE00521	V04AE00525	V04AE00525	15	8	2.2	0.15	0.3	0.6	3.0	500
2 x 1.5 12 HL 2 x 18			V04AE00718	V04AE00718	V04AE00718	20	12	2.2	0.15	0.3	0.6	3.0	500
2 x 1.5 18 L 2 x 18			V04AE00744	V04AE00745	V04AE00745	26	18	2.2	0.15	0.3	0.6	3.0	500
2 x 2.5 10 N 2 x 14			V04AE00001	V04AE00001	V04AE00001	16	10	2.8	0.2	0.4	0.4	4.0	500
2 x 2.5 12 HL 2 x 14			V04AE00748	V04AE00748	V04AE00748	21	12	2.8	0.2	0.4	0.4	4.0	500
2 x 2.5 18 L 2 x 14			V04AE00750	V04AE00750	V04AE00747	27	18	2.8	0.2	0.4	0.4	4.0	500
2 x 4 12 N 2 x 12			V04AE00749	V04AE00749	V04AE00748	22	12	3.8	0.2	0.5	0.5	5.0	500
2 x 4 18 L 2 x 12			V04AE00749	V04AE00749	V04AE00749	28	18	3.8	0.2	0.5	0.5	5.0	500
2 x 6 12 N 2 x 10			V04AE00749	V04AE00749	V04AE00749	23	12	4.8	0.3	0.5	0.4	6.2	500
2 x 6 18 L 2 x 10			V04AE00749	V04AE00749	V04AE00749	29	18	4.8	0.3	0.5	0.4	6.2	500
2 x 9 12 N 2 x 8			V04AE00749	V04AE00749	V04AE00749	24	12	5.8	0.2	0.5	0.4	7.0	500
2 x 10 12 L 2 x 8			V04AE00749	V04AE00749	V04AE00749	30	10	5.8	0.2	0.5	0.4	7.0	500
2 x 16 18 N 2 x 8			V04AE00749	V04AE00749	V04AE00749	29	16	8.3	0.3	0.6	0.4	7.0	500
2 x 18 25 L 2 x 8			V04AE00749	V04AE00749	V04AE00749	38	25	8.3	0.3	0.6	0.4	7.0	500