

INSULATED BOOTLACE FERRULE FOR DUAL CABLES

V30AE000740

0.75mm² x 18mm Dual Ferrule - White

- Funnel feed-in made of polypropylene
- Heat resistant up to 120 °C
- For wires from 0.5...16 mm²
- Material: E-Cu/A-Cu, galvanically tin-plated



PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Colour	White
Cross section max	0.75 mm ²
Rated wire cross section to (AWG)	18
Standard	German Standard

DIMENSIONS

Length	24 mm
Length of tube	18 mm
Stripping length	21 mm
Thickness of collar	0.3 mm
Thickness of tube	0.15 mm
Diameter of tube	1.7 mm

MATERIALS

Conductor tube	Copper alloy
Contact surface	Galvanic tin-plated, shiny


Plastic collar	Polypropylene-homopolymer
Operating temperature from	-5 °C
Operating temperature to	105 °C

APPROVALS


DIN 46228-4:1990	Yes
DIN 46228-1:1992	No

ADDITIONAL DATA

Tariff code	85369010
Country of origin	DE
Weight	0.22 g
Pack size	500

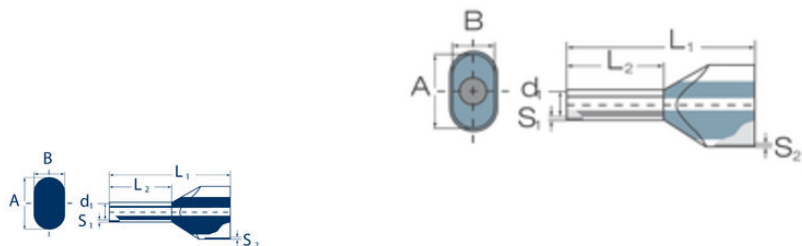

Description		AWG	Fabricator: David Ry Cable: 500µm Polaris		Average time Dimensions					Block Prices		
size	type	Type	Zur	Len	RDS	L	L ₂	L ₃	A	H	SPR	
2 x 0.8	0	N 2 x 0	V50A000064	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000065	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000066	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000067	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000068	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000069	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000070	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000071	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000072	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000073	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000074	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000075	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000076	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000077	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000078	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000079	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000080	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000081	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000082	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000083	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000084	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000085	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000086	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000087	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000088	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000089	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000090	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000091	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000092	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000093	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000094	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000095	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000096	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000097	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000098	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000099	10	0	0	12	0.18	0.05	0.5	8	000
2 x 0.8	0	N 2 x 0	V50A000100	10	0	0	12	0.18	0.05	0.5	8	000

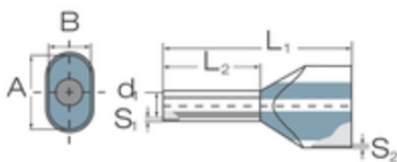[illegible]