

## INSULATED BOOTLACE FERRULE FOR DUAL CABLES

V30AE001143

16mm<sup>2</sup> x 16mm Dual Ferrule - Green

- Funnel feed-in made of polypropylene
- Heat resistant up to 120 °C
- For wires from 0.5...16 mm<sup>2</sup>
- Material: E-Cu/A-Cu, galvanically tin-plated



### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

Colour	Green
Cross section max	16 mm <sup>2</sup>
Rated wire cross section to (AWG)	6
Standard	German Standard

#### DIMENSIONS

Length	29 mm
Length of tube	16 mm
Stripping length	20 mm
Thickness of collar	0.6 mm
Thickness of tube	0.3 mm
Diameter of tube	8.3 mm

#### MATERIALS

Conductor tube	Copper alloy
Contact surface	Galvanic tin-plated, shiny


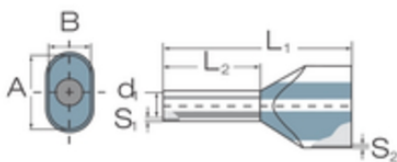
Plastic collar	Polypropylene-homopolymer
Operating temperature from	-5 °C
Operating temperature to	105 °C

## APPROVALS

DIN 46228-4:1990	Yes
DIN 46228-1:1992	No

## ADDITIONAL DATA

<b>Tariff code</b>	85369010
<b>Country of origin</b>	DE
<b>Weight</b>	1.95 g
<b>Pack size</b>	50

[illegible][illegible]