OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

PANEL MOUNT BEACON WITH SOUNDER, E SERIES

814511405
LED Panel mount buzzer, Ø65mm, Amber, 24 V ac/dc, ELG

- Ø 22.5mm Hole mounted panel mount buzzer with LED beacon
- 85-103 dB Range
- Continuous, Pulsing or wobble tones



PRODUCT DESCRIPTION

The E series of panel mounted LED buzzers offers a high quality and flexible signalling solution.

- universally useable panel mount buzzer with LED control light
- sizes Ø 65 mm – Ø 45 mm
- models:

ELG-ELM panel mount buzzer – LED control light sound and light synchronized continuous tone – steady light pulsing tone – flashing light in pulse frequency wobble tone – flashing light in pulse frequency


EDG-EDM panel mount buzzer – LED control light continuous tone and steady light separately switchable

- well distinguishable tone types via terminal selectable (ELG)
- volume also in mounted condition infinitely adjustable
- LED control light – high brightness, maintenance free
- PLC fit (leakage/inrush current)
- for mounting in Ø 22 mm and 30,5 mm bore holes (with adapter)

TECHNICAL DATA

Diameter	65 mm
Flash frequency	2 Hz
Housing Colour	Black
IP class	IP65
Lens colour	Orange
Light source	LED
Light type	Orange LED
Mounting	Panel mount

Nominal current max	0.047 A
Nominal current min	0.047 A
Number of tones	3
Sound control	Yes
Sound level max	103 dB
Sound level min	85 dB
Supply voltage	24 V
Supply voltage ac/dc max	26.4 V
Supply voltage ac/dc min	21.6 V
Temperature operational max	60 °C
Temperature operational min	-25 °C
Terminal connection	2.5 mm²
Tone frequency max	2800 Hz
Tone frequency min	2800 Hz
Weight	110 g

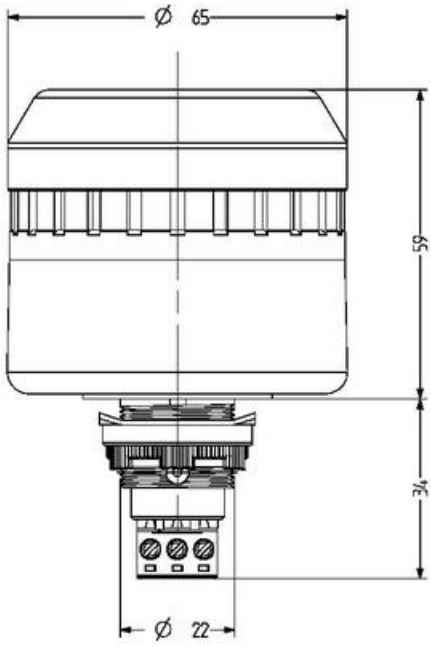

Tone table

Tone and light selection on terminal			
La	N	Lb	Tone and light synchronized
X	X		pulsing tone / LED flashing light
	X	X	wobble tone / LED flashing light
X	X	X	continuous tone / steady light







