



## CUBIC WARNING LIGHT LED SERIES "Q"

876162405

LED Steady/flashing+Buzzer, 94mm, Red, 24 V ac/dc,  
QSS

- IP 66
- LED / Xenon
- Can be combined with siren series "A"



### PRODUCT DESCRIPTION


The Q Series warning lights combine modern LED and Xenon strobe technologies to deliver powerful and reliable signal strength in a compact design. Featuring a unique lens, these lights produce a clear, bright light with excellent spread. The LED option ensures long life, low power consumption, and superior durability, especially against vibrations. With an IP66 rating, the Q Series is robust enough for use in industrial, fire, marine, and other demanding environments. Additionally, these warning lights can be seamlessly integrated with the siren series "A" for enhanced signalling capabilities.

### TECHNICAL DATA

Diameter	94mm
Housing Colour	Red
IK class	9
IP class	IP65
Lens colour	Red
Light source	LED
Light type	Red LED
Mounting	Independent
Sound level max	80 dB
Supply voltage ac/dc max	24 V
Supply voltage ac/dc min	24 V
Temperature operational max	60 °C
Temperature operational min	-30 °C


## Terminal connection

2.5 mm<sup>2</sup>

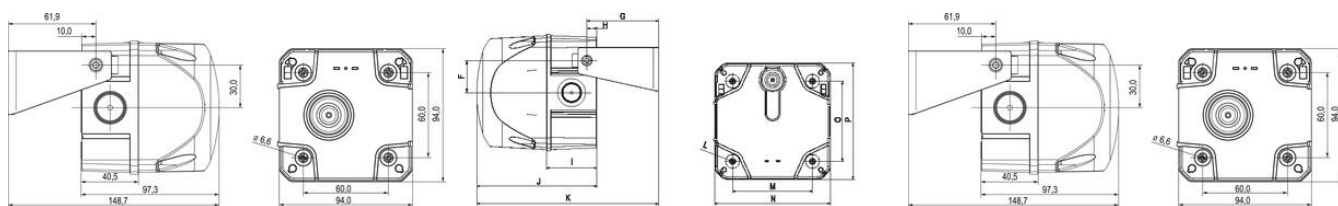

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
Size 2	143	96	10	32	50	36.6	81.6	11.5	57.4	136.8	206.8	6.5	91	131.8	91	131.8
Size 3	199	112	16	48	70	56	105.5	18.5	72.5	175.8	262.8	6.5	124	183.5	124	183.5
Size 4	243.3	140	10	70	100	83	133.3	16.8	90.8	223.8	340	167	228.4	167	228.4	16.5

Measuring unit mm

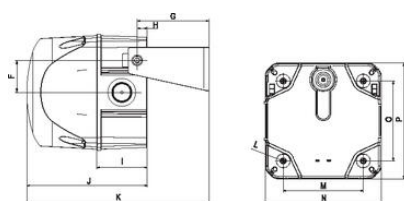

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
Size 2	143	96	10	32	50	36.6	81.6	11.5	57.4	136.8	206.8	6.5	91	131.8	91	131.8
Size 3	199	112	16	48	70	66	105.5	18.5	72.5	175.2	262.8	6.5	124	183.5	124	183.5
Size 4	243.3	140	10	70	100	83	133.3	16.8	90.5	223.4	340	167	228.4	167	228.4	6.5

Measuring unit mm