OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

# SIGNAL TOWER Ø 70MM ECO

900011313
LED Steady, Amber, 230-240 V ac, XDC

- Modular signal tower
- Integrated LED or filament bulb
- Wide control voltage range



### PRODUCT DESCRIPTION

The ECO range of modular signal towers uses the highest quality components and the latest technology but at an affordable price,

- Modular signal tower series in diameters Ø 70 mm, 60 mm and 40 mm for universal applications
- Modern signal tower concept based on up-to-date LED technique, alternative operation with conventional incandescent bulb technique
- Excellent cost/performance ratio
- Complete range of bright LED modules in function modes
- LED steady light
- LED flashing light
- LED strobe light (single flash)
- LED multi strobe light (multi flash)
- LED steady/LED strobe and LED multi strobe modules
- Very long lifetime due to maintenance free LED technique, vibration proof and significantly reduced nominal current
- Piezo buzzer and multi tone siren modules
- Easy to wire connections
- Comprehensive range of mounting options including quick mount solutions
- Plc fit (leakage and inrush current)
- High ingress protection IP 66 certified to UL type 4/4X/13

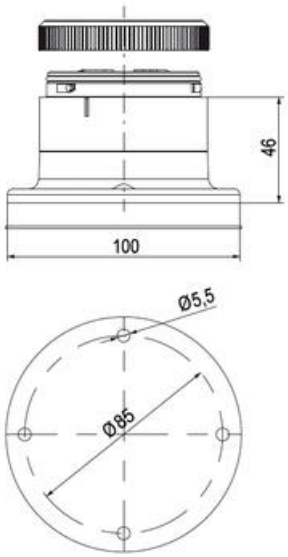
# TECHNICAL DATA

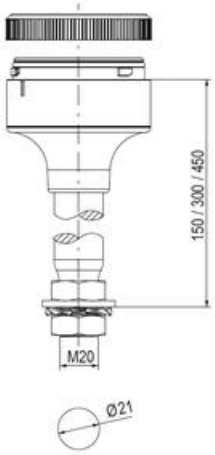
## DATA

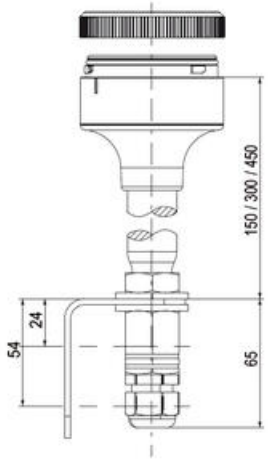
| | |
|---|---|
| **Lens colour** | Orange |
| **IP class** | IP66 |
| **Light source** | LED |
| **Light type** | Orange LED |
| **Supply voltage** | 230 V |
| **Supply voltage ac max** | 253 V AC |

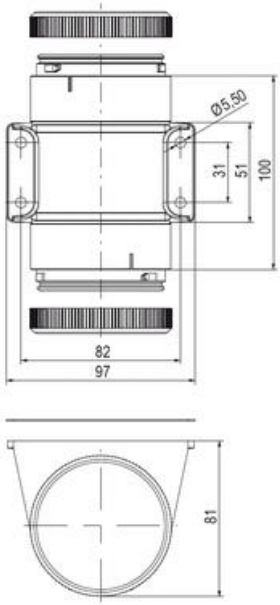
| | |
|---|---|
| **Supply voltage ac min** | 207 V AC |
| **Mounting** | Bayonet |
| **Nominal current max** | 0.028 A |
| **Temperature operational min** | -30 °C |
| **Temperature operational max** | 60 °C |
| **Weight** | 100 g |


| | |
|---|---|
| **Number of optional modules** | 2 |
| **Diameter** | 70 mm |
| **Nominal current min** | 0.027 A |




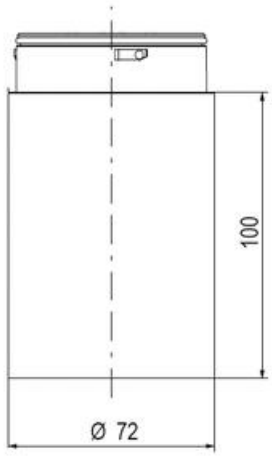



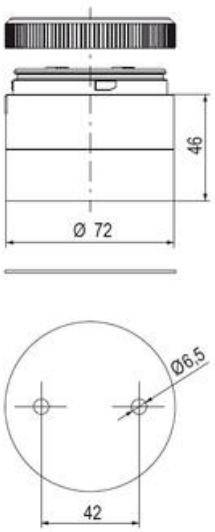



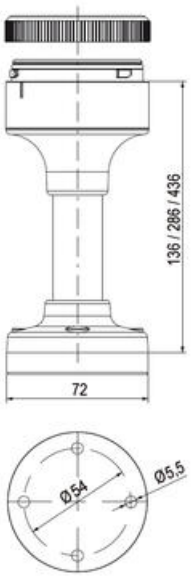



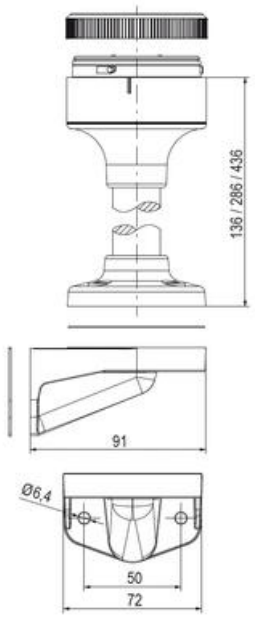



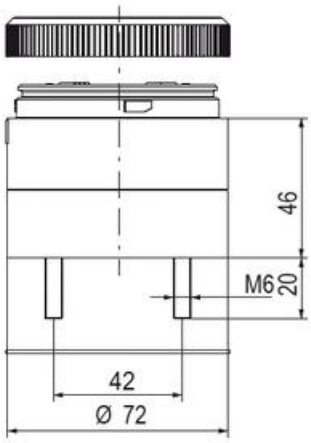







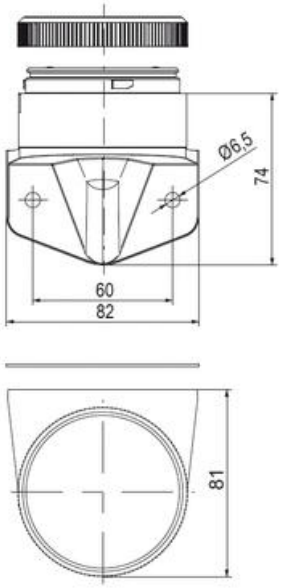

46
Ø 72
Ø6,5
42

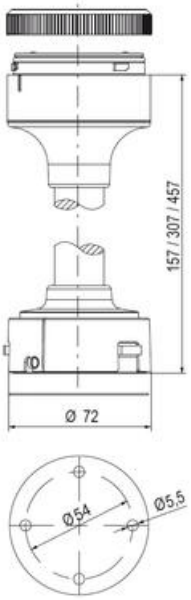

136 / 286 / 436
72
Ø54
Ø5,5

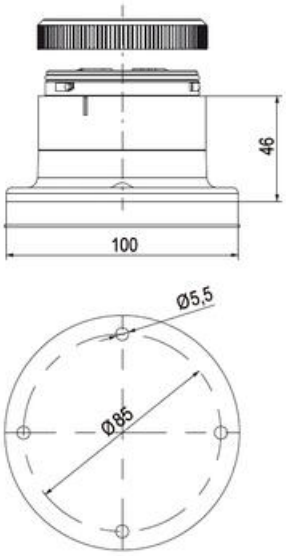

136 / 286 / 436
91
Ø6,4
50
72

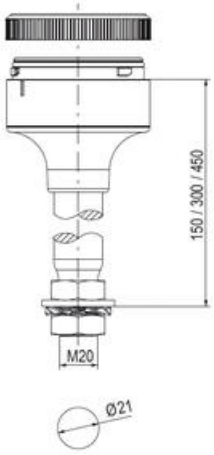

46
M6
20
42
Ø 72

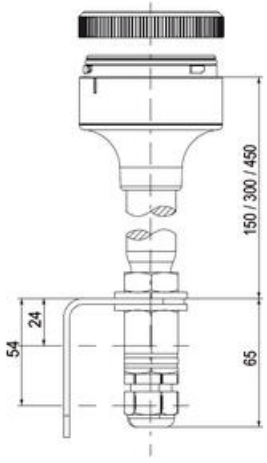

70
Ø 72

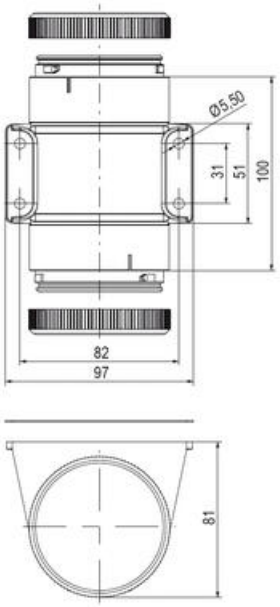

Ø6,5
74
60
82
81



157 / 307 / 457
Ø 72
Ø54
Ø5,5



46
100
Ø5,5
Ø85

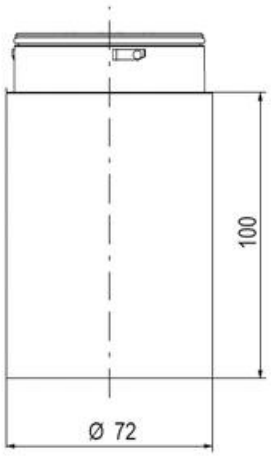

150 / 300 / 450
M20
Ø21

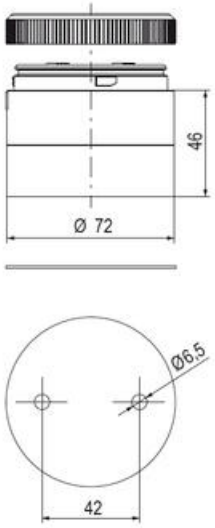

150 / 300 / 450
24
54
65

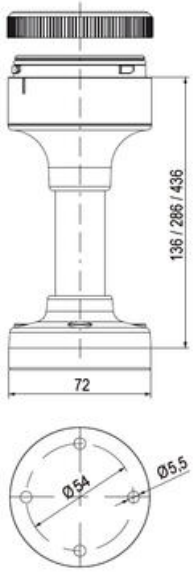

Ø5,50
31
51
100
82
97
81

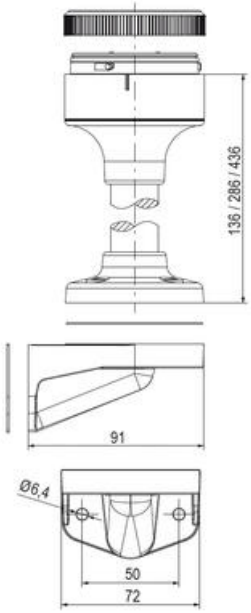

61
73

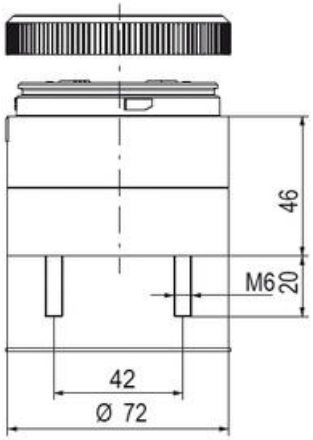

74
73



100
Ø 72

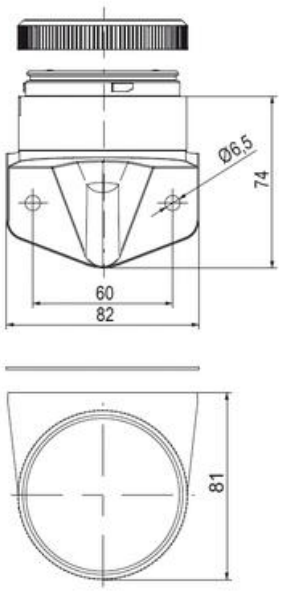

46
Ø 72
Ø6,5
42

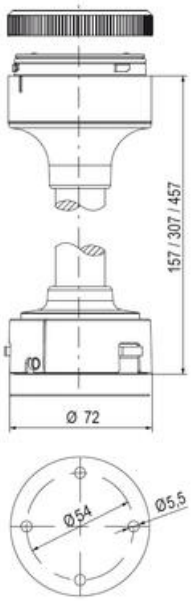

136 / 286 / 436
72
Ø54
Ø5,5


136 / 286 / 436
91
Ø6,4
50
72


46
M6
20
42
Ø 72


70
Ø 72


Ø6.5
74
60
82
81


157 / 307 / 457
Ø 72


Ø54
Ø5.5