


SPR

1010.101.006

- Galvanized steel
- Highly Flexible
- Lateral compression resistant
- Provides protection against high mechanical stress

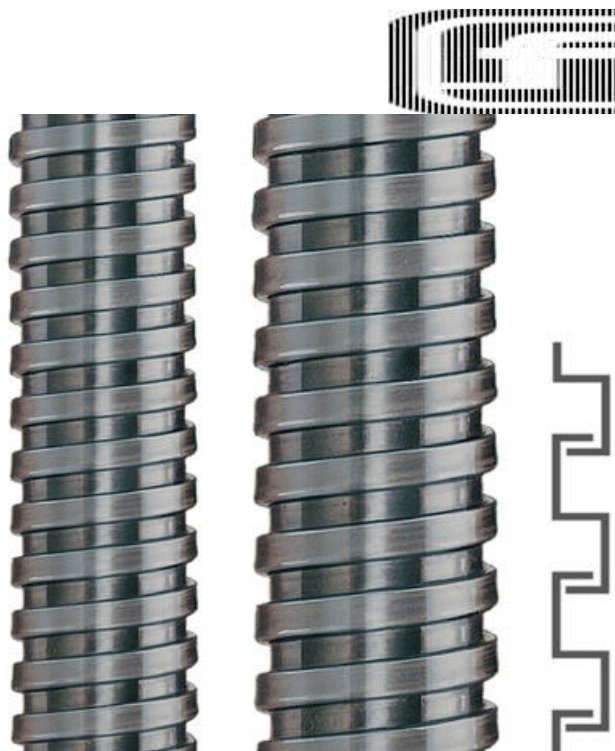

PRODUCT DESCRIPTION

TECHNICAL DATA

Bending radius $\pm 10\%$ dynamic	50
Bending radius -10% static	20
Hose dimension AD	8
Inner dimensions	6 mm
IP class	IP40
Outer dimensions	8 mm
Pack size	50
Weight / m	0,048