


SPR-VA

1010.801.014

SPR-VA, stainless steel, withteltage AD 14 x 17 mm

- Stainless steel
- Highly flexible
- Lateral compression resistant
- Provides protection against high mechanical stress

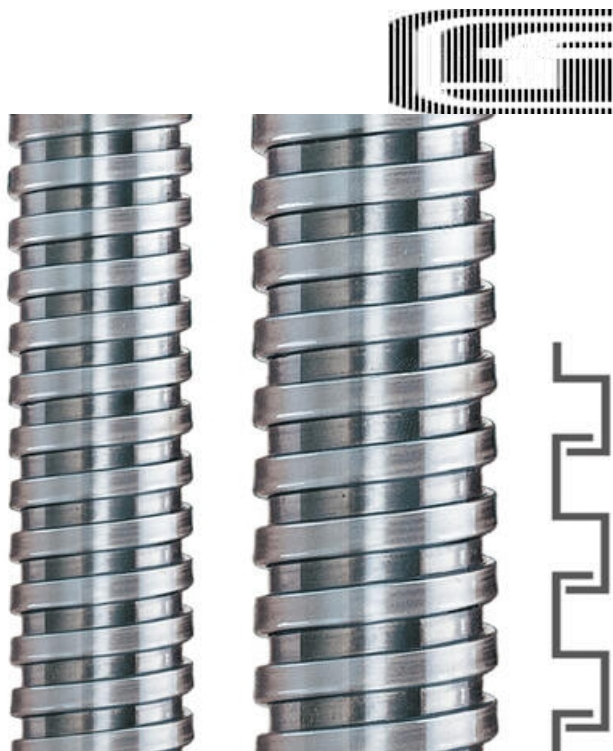

PRODUCT DESCRIPTION

TECHNICAL DATA

Approvals	VDE
Bending radius $\pm 10\%$ dynamic	75
Bending radius -10% static	30
Hose dimension AD	14
Inner dimensions	14 mm
IP class	IP40
Material	Stainless steel
Outer dimensions	17 mm
Pack size	50 m
Temperature operational max	600 °C
Temperature operational min	-200 °C
Weight	0.15 kg/m