


SPR-VA

1010.801.016

SPR-VA, stainless steel, withteltage AD 16 x 19 mm

- Stainless steel
- Highly flexible
- Lateral compression resistant
- Provides protection against high mechanical stress

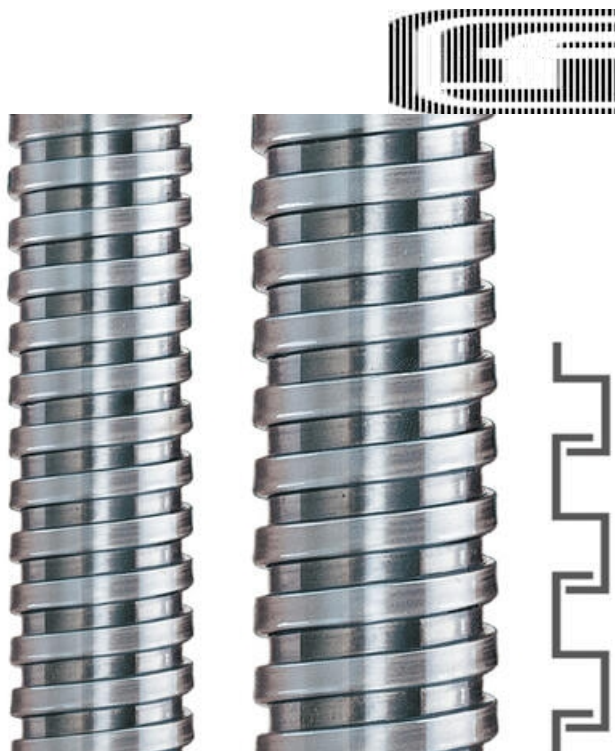

PRODUCT DESCRIPTION

TECHNICAL DATA

Approvals	VDE
Bending radius $\pm 10\%$ dynamic	92
Bending radius -10% static	35
Hose dimension AD	19
Inner dimensions	16 mm
IP class	IP40
Material	Stainless steel
Outer dimensions	19 mm
Pack size	50 m
Temperature operational max	600 °C
Temperature operational min	-200 °C
Weight	0.185 kg/m