


SPR-VA

1010.801.051

SPR-VA, stainless steel, withteltage AD 51 x 56 mm

- Stainless steel
- Highly flexible
- Lateral compression resistant
- Provides protection against high mechanical stress

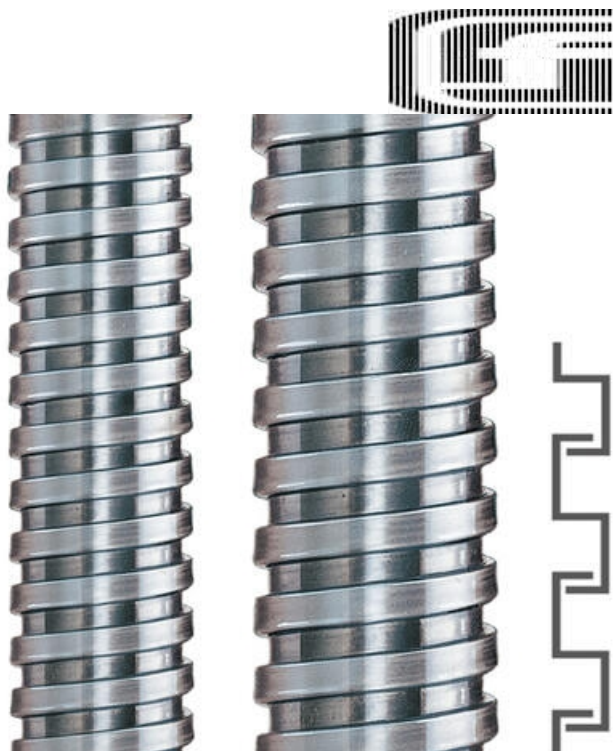

PRODUCT DESCRIPTION

TECHNICAL DATA

Approvals	VDE
Bending radius $\pm 10\%$ dynamic	250
Bending radius -10% static	100
Hose dimension AD	56
Inner dimensions	51 mm
IP class	IP40
Material	Stainless steel
Outer dimensions	56 mm
Pack size	25 m
Temperature operational max	600 °C
Temperature operational min	-200 °C
Weight	0.78 kg/m