


FLEXAGRAFF®-VA METAL CONDUIT

1080.801.005

FLEXAgraff-VA, stainless steel AD 5 x 7 mm

- Stainless steel
- Flexible
- Stretch resistant
- Compression resistant

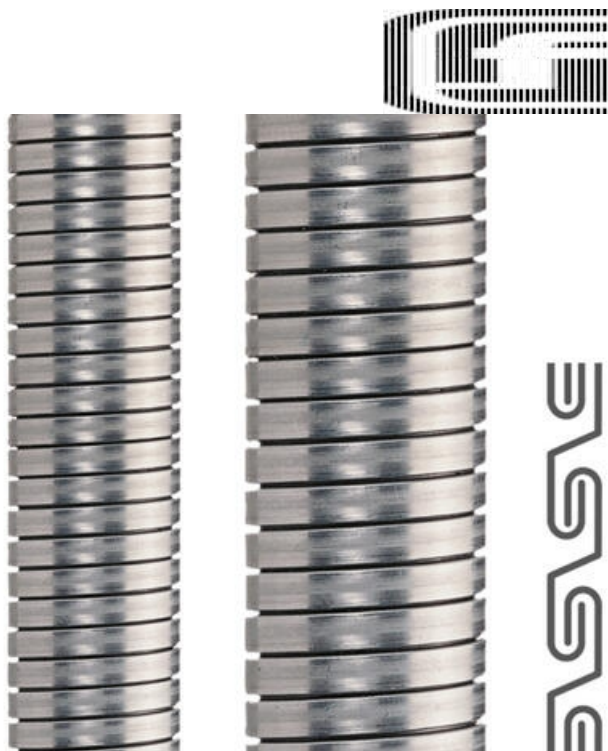

PRODUCT DESCRIPTION

TECHNICAL DATA

Approvals	VDE
Bending radius $\pm 10\%$ dynamic	115
Bending radius -10% static	45
Hose dimension AD	7
Inner dimensions	5 mm
IP class	IP40
Material	Stainless steel
Outer dimensions	7 mm
Pack size	50 m
Temperature operational max	600 °C
Temperature operational min	-200 °C
Weight	0.071 kg/m