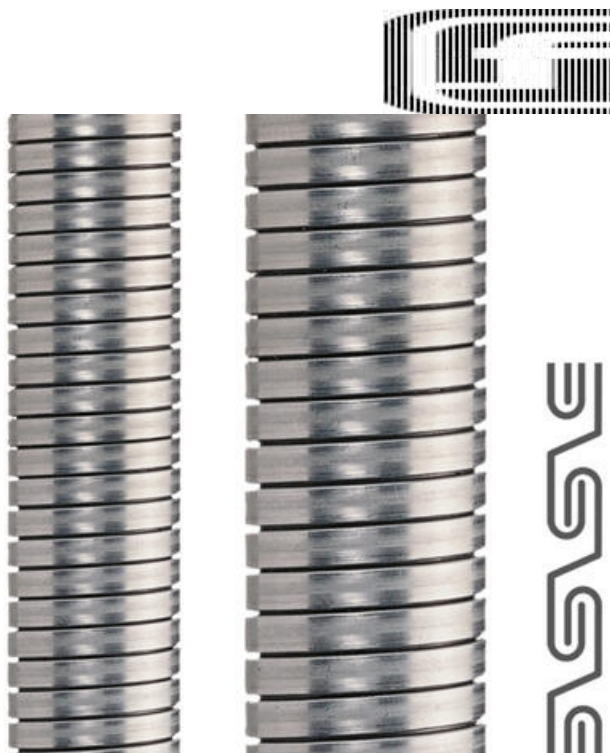


FLEXAGRAFF®-VA METAL CONDUIT

1080.801.010

FLEXAgraff-VA, stainless steel AD 10 x 13 mm

- Stainless steel
- Flexible
- Stretch resistant
- Compression resistant

**PRODUCT DESCRIPTION****TECHNICAL DATA**

Approvals	VDE
Bending radius $\pm 10\%$ dynamic	160
Bending radius -10% static	65
Hose dimension AD	13
Inner dimensions	10 mm
IP class	IP40
Material	Stainless steel
Outer dimensions	13 mm
Pack size	50 m
Temperature operational max	600 °C
Temperature operational min	-200 °C
Weight	0.29 kg/m