


FLEXAGRAFF®-VA METAL CONDUIT

1080.801.018

FLEXAgraff-VA, stainless steel AD 12 x 15 mm

- Stainless steel
- Flexible
- Stretch resistant
- Compression resistant

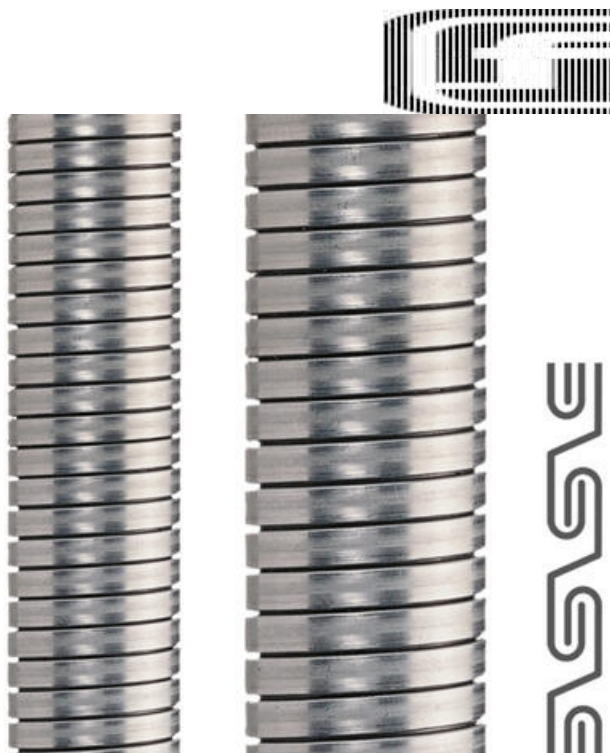

PRODUCT DESCRIPTION

TECHNICAL DATA

Approvals	VDE
Bending radius $\pm 10\%$ dynamic	175
Bending radius -10% static	70
Hose dimension AD	21
Inner dimensions	18 mm
IP class	IP40
Material	Stainless steel
Outer dimensions	21 mm
Pack size	50 m
Temperature operational max	600 °C
Temperature operational min	-200 °C
Weight	0.32 kg/m