


FLEXAGRAFF®-VA METAL CONDUIT

1080.801.024

FLEXAgraff-VA, stainless steel AD 12 x 15 mm

- Stainless steel
- Flexible
- Stretch resistant
- Compression resistant

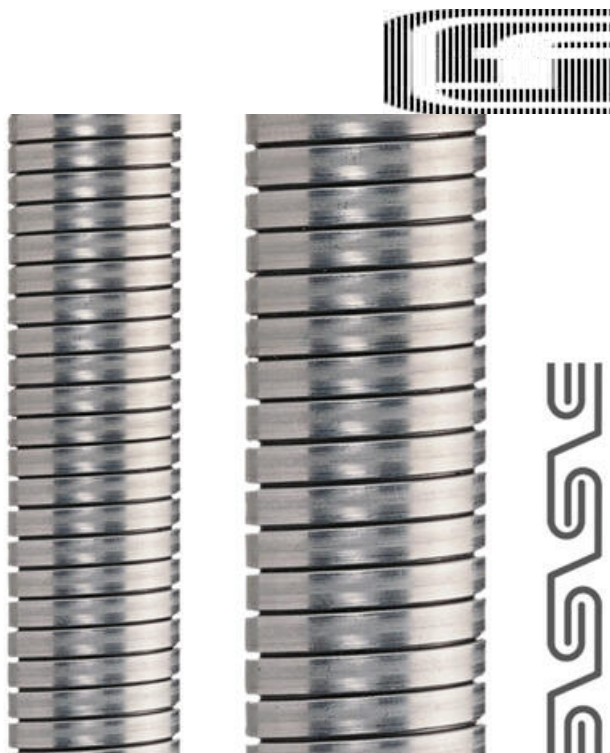

PRODUCT DESCRIPTION

TECHNICAL DATA

Approvals	VDE
Bending radius $\pm 10\%$ dynamic	225
Bending radius -10% static	90
Hose dimension AD	27
Inner dimensions	24 mm
IP class	IP40
Material	Stainless steel
Outer dimensions	27 mm
Pack size	50 m
Temperature operational max	600 °C
Temperature operational min	-200 °C
Weight	0.43 kg/m