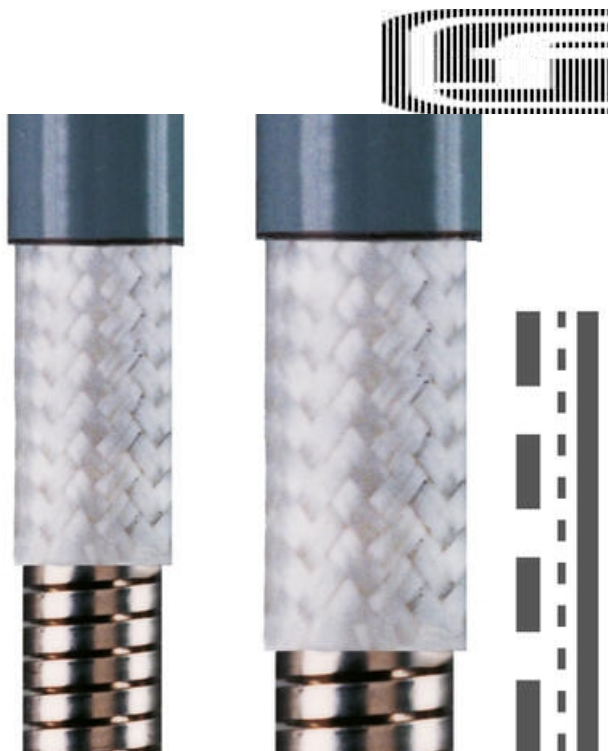


**PS-VA / PSL-VA**

0133.901.013

- Stainless steel V2A | Braiding: fiber glass | Sheathing: silicone-rubber
- Stretch resistant
- Air and liquid-tight
- Widely resistant to solvents and chemicals

**PRODUCT DESCRIPTION****TECHNICAL DATA**

|                                   |        |
|-----------------------------------|--------|
| Bending radius $\pm 10\%$ dynamic | 30     |
| Bending radius $-10\%$ static     | 12     |
| Hose dimension AD                 | 5.8    |
| Inner dimensions                  | 3.8 mm |
| IP class                          | IP68   |
| Outer dimensions                  | 5.8 mm |
| Pack size                         | 100    |
| Weight / m                        | 35     |