


PS-VA / PSL-VA

0133.900.008

- Stainless steel V2A | Braiding: fiber glass | Sheathing: silicone-rubber
- Stretch resistant
- Air and liquid-tight
- Widely resistant to solvents and chemicals

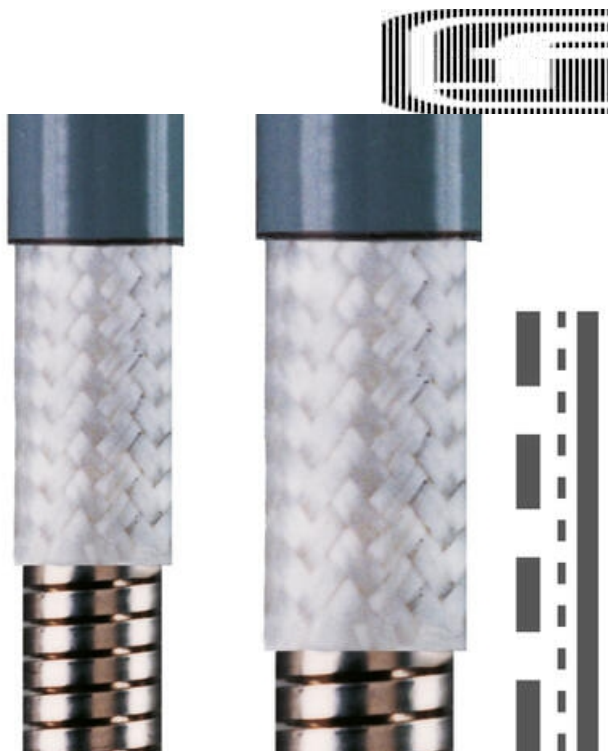

PRODUCT DESCRIPTION

TECHNICAL DATA

Bending radius $\pm 10\%$ dynamic	110
Bending radius -10% static	45
Hose dimension AD	11.6
Inner dimensions	8 mm
IP class	IP68
Outer dimensions	11.6 mm
Pack size	50
Weight / m	0.191