


PS-VA / PSL-VA

0133.901.006

- Stainless steel V2A | Braiding: fiber glass | Sheathing: silicone-rubber
- Stretch resistant
- Air and liquid-tight
- Widely resistant to solvents and chemicals

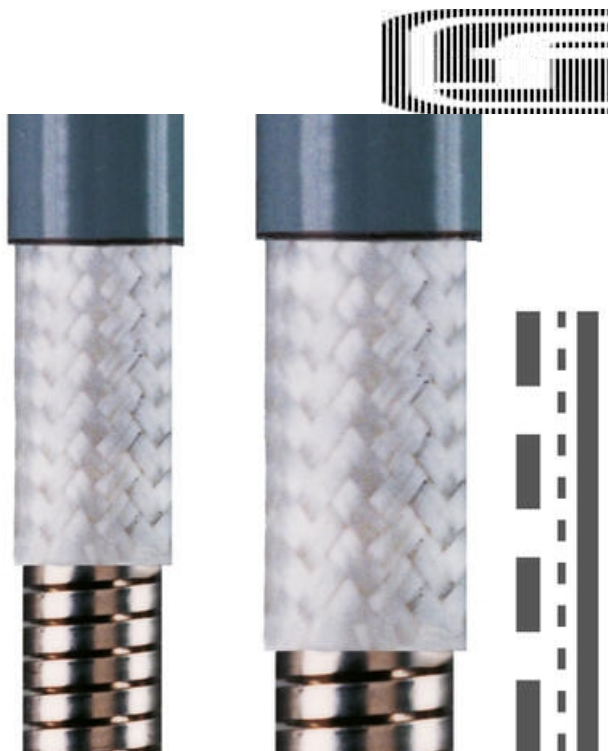

PRODUCT DESCRIPTION

TECHNICAL DATA

Bending radius $\pm 10\%$ dynamic	65
Bending radius -10% static	25
Hose dimension AD	8.9
Inner dimensions	6.5 mm
IP class	IP68
Outer dimensions	8.9 mm
Pack size	50
Weight / m	0.065