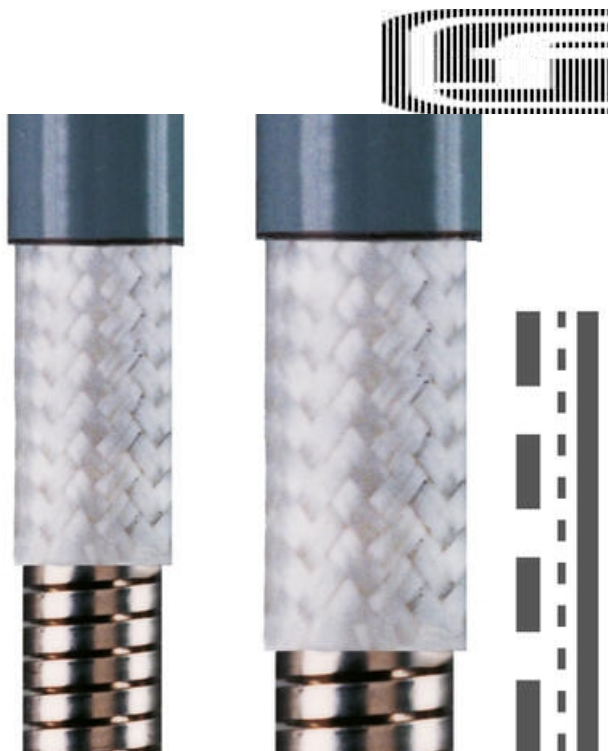


PS-VA / PSL-VA

0133.900.003

- Stainless steel V2A | Braiding: fiber glass | Sheathing: silicone-rubber
- Stretch resistant
- Air and liquid-tight
- Widely resistant to solvents and chemicals

**PRODUCT DESCRIPTION****TECHNICAL DATA**

Bending radius $\pm 10\%$ dynamic	50
Bending radius -10% static	20
Hose dimension AD	5.3
Inner dimensions	3 mm
IP class	IP68
Outer dimensions	5.3 mm
Pack size	100
Weight / m	0.044