


OEM Automatic Ltd Address: Whiteacres, Whetstone Leicester, LE8 6ZG 0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

ROHRFLEX PA 6-L IN ORANGE

0261.209.006 ROHRflex PA6 L AD10,0 in orange

- UL94(HB) classification
- Designed for use in electric vehicles
- Compatible with Flexa quick connectors
- IP68/ IP69K

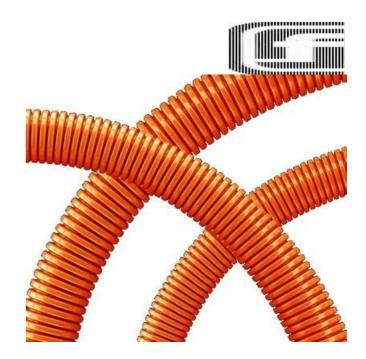

PRODUCT DESCRIPTION

The ROHRflex PA 6-L in orange is designed for the emobility industry. Protective all-plastic tubing, internally and externally corrugated, fine or coarse profile. The conduits meet all regulations required for the emobility industry in Europe including fire protection according to ECCE-R 118

TECHNICAL DATA

Approvals	CSA US, RU, VDE
Bending radius ±10% dynamic	35
Bending radius -10% static	13
Colour	Orange
Fire rating	UL94-HB
Hose dimension AD	10
Inner dimensions	6.5 mm
IP class	IP68, IP69
Material	Polyamide
Outer dimensions	10 mm
Pack size	50 m
Temperature operational max	120 °C
Temperature operational min	-25 °C
Weight	0.02 kg/m