

## ROHRFLEX® PA 6 PROTECTIVE CONDUIT

0233.201.006




- Polyamide conduit for mechanical engineering
- Flexible material
- Halogen-free, flame retardant
- UV-resistant



### PRODUCT DESCRIPTION

ROHRflex PA 6 is a highly versatile conduit for various industries. Both internally and externally corrugated. Oil resistant up to +80 °C, also resistant against acids and solvents. Applications include machine building, vehicles and electrical installations.

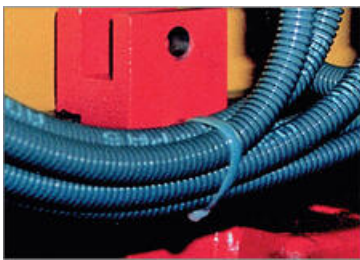

Supplied in full packages.

### TECHNICAL DATA

Approvals	CE, RU, UL, VDE
Bending radius $\pm 10\%$ dynamic	35
Bending radius $-10\%$ static	13
Colour	Grey
Fire rating	UL94-VO
Hose dimension AD	10
Inner dimensions	6.5 mm
Material	Polyamide
Outer dimensions	10 mm
Pack size	50 m
Temperature operational max	115 °C
Temperature operational min	-40 °C

Type	ROHRFLEX PA6
Weight / m	0.018

