

RQT T DISTRIBUTOR, TPE

5020.067.208

T distributor RQT 3x15,8 black

- IP66
- Temperature range from -40 °C to +120 °C





PRODUCT DESCRIPTION

T distributor RQT made of PA plastics, quick-type connectors.

TECHNICAL DATA

Colour	Black
Hose dimension AD	15.8
IP class	IP66
Material	thermoplastic
Pack size	10
Temperature operational max	120 °C
Temperature operational min	-40 °C
Weight kg / 100 ± 10%	1.51

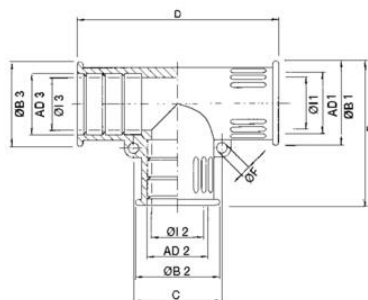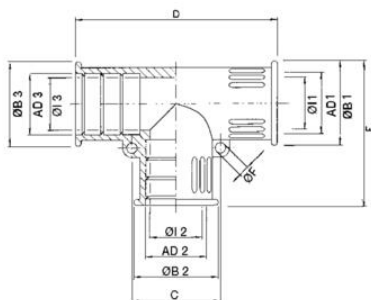

Grey	Black	AD1/2/3	ØI1	ØI2	ØI3	ØB1	ØB2	ØB3	D	E	C	F
5020.067.007	5020.067.207	3x13.0	10.0	10.0	10.0	21.0	21.0	21.0	51.0	36.0	21.0	4
5020.067.008	5020.067.208	3x15.8	14.0	14.0	14.0	25.0	25.0	25.0	63.0	44.0	24.5	4
5020.067.001	5020.067.201	3x21.2	18.0	18.0	18.0	29.5	29.5	29.5	71.0	50.0	29.5	4
5020.067.009	5020.067.209	1x28.5 + 2x21.2	18.0	25.5	18.0	32.0	36.5	32.0	78.0	51.0	38.5	4
5020.067.002	5020.067.202	3x28.5	25.5	25.5	25.5	36.5	36.5	36.5	77.0	57.5	37.0	4
5020.067.010	5020.067.210	1x34.5 + 2x28.5	25.5	31.5	25.5	36.5	42.5	36.5	83.5	57.5	42.0	4
5020.067.011	5020.067.211	3x34.5	31.5	31.5	31.5	42.5	42.5	42.5	85.0	64.0	42.0	4

Grey	Black	AD1/2/3	ØI1	ØI2	ØI3	ØB1	ØB2	ØB3	D	E	C	F
5020.067.007	5020.067.207	3x13.0	10.0	10.0	10.0	21.0	21.0	21.0	51.0	36.0	21.0	4
5020.067.008	5020.067.208	3x15.8	14.0	14.0	14.0	25.0	25.0	25.0	63.0	44.0	24.5	4
5020.067.001	5020.067.201	3x21.2	18.0	18.0	18.0	29.5	29.5	29.5	71.0	50.0	29.5	4
5020.067.009	5020.067.209	1x28.5 + 2x21.2	18.0	25.5	18.0	32.0	36.5	32.0	78.0	51.0	38.5	4
5020.067.002	5020.067.202	3x28.5	25.5	25.5	25.5	36.5	36.5	36.5	77.0	57.5	37.0	4
5020.067.010	5020.067.210	1x34.5 + 2x28.5	25.5	31.5	25.5	36.5	42.5	36.5	83.5	57.5	42.0	4
5020.067.011	5020.067.211	3x34.5	31.5	31.5	31.5	42.5	42.5	42.5	85.0	64.0	42.0	4

