OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

SPR-AS METAL CONDUIT

1010.111.008
SPR-AS AD10 8x10 mm metal conduit



- Galvanized steel
- Flexible
- Good tensile strenght and compression resistance
- Provides protection against high mechanical stress

PRODUCT DESCRIPTION

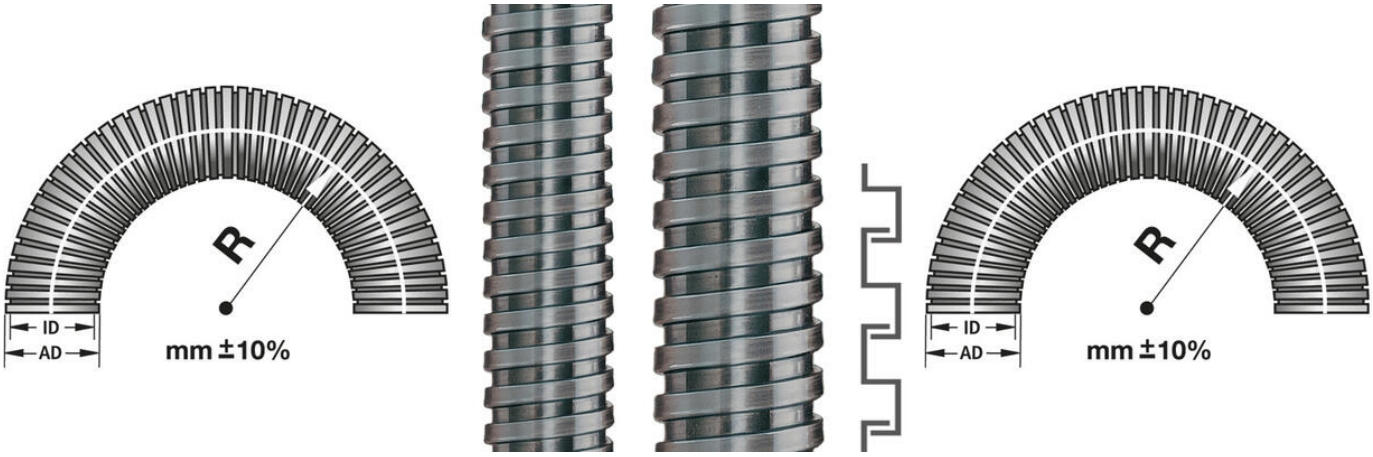
SPR-AS is a protective metal conduit made from galvanized steel. Highly versatile conduit for wide variety of applications.

TECHNICAL DATA

TECHNICAL DATA

Hose dimension AD	10
Inner dimensions	8 mm
Outer dimensions	10 mm
Pack size	50 m
IP class	IP40
Approvals	VDE, BWB
Bending radius -10% static	20
Bending radius ±10% dynamic	50
Temperature operational min	-50 °C
Temperature operational max	250 °C
Weight / m	0.053
Material	Galvanized steel
Type	SPR-AS

UV resistant	Yes
Halogen-free	Yes


R
ID
AD
mm ±10%
R
ID
AD
mm ±10%

