


FLEXAGRAFF® - CU-PU PROTECTIVE CONDUIT

2540.707.029

FLEXAGRAFF-CU-PU AD36 29x37 mm metal conduit
green

- Galvanized steel, copper braiding, PU sheathing
- Resistant against oils and chemicals
- Liquid-tight

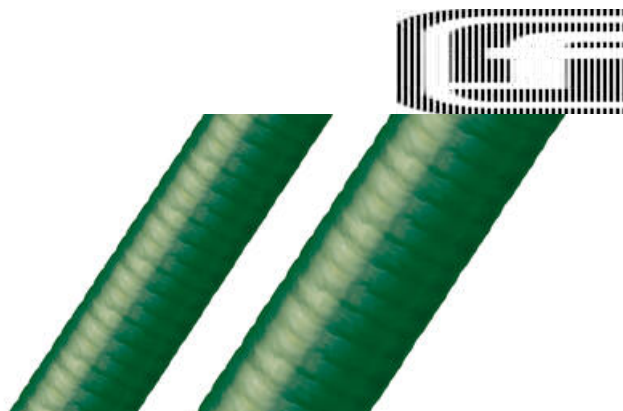

PRODUCT DESCRIPTION

FLEXAgraft® - CU-PU metal conduit is made from galvanized steel and is covered with an overall copper braiding and PU sheathing. Good EMC characteristics. IP68 rated.

TECHNICAL DATA

Approvals	EMC, VDE
Bending radius $\pm 10\%$ dynamic	325
Bending radius -10% static	130
Hose dimension AD	36
Inner dimensions	29 mm
Outer dimensions	37 mm
Pack size	10 m
Temperature operational max	100 °C
Temperature operational min	-50 °C
Weight / m	1

