


## FLEXAGRAFF® - CU-PU PROTECTIVE CONDUIT

2540.707.038

FLEXAgraff-CU-PU AD45 38x46 mm metal conduit  
green

- Galvanized steel, copper braiding, PU sheathing
- Resistant against oils and chemicals
- Liquid-tight

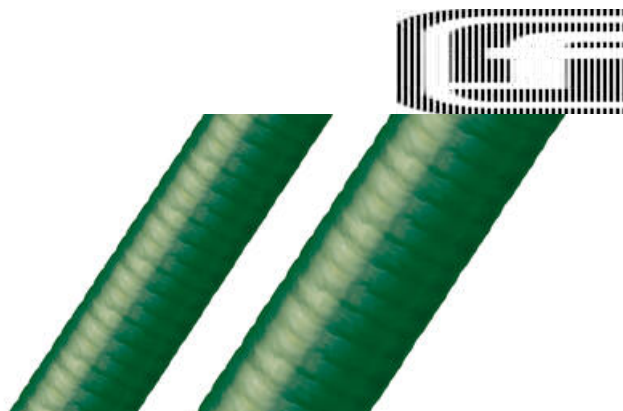

### PRODUCT DESCRIPTION

FLEXAgraff® - CU-PU metal conduit is made from galvanized steel and is covered with an overall copper braiding and PU sheathing. Good EMC characteristics. IP68 rated.

### TECHNICAL DATA

|                                   |          |
|-----------------------------------|----------|
| Approvals                         | EMC, VDE |
| Bending radius $\pm 10\%$ dynamic | 375      |
| Bending radius -10% static        | 150      |
| Hose dimension AD                 | 45       |
| Inner dimensions                  | 38 mm    |
| Outer dimensions                  | 46 mm    |
| Pack size                         | 10 m     |
| Temperature operational max       | 100 °C   |
| Temperature operational min       | -50 °C   |
| Weight / m                        | 1.25     |

