


LIQUID-TIGHT-EF PROTECTIVE METAL CONDUIT

2080.111.010

LIQUID-TIGHT-EF AD 5/16" grey

- Conduit made from galvanized steel, PVC sheathing
- Liquid-tight
- Resistant against chemicals and oils
- Flame-resistant
- IP68 rated

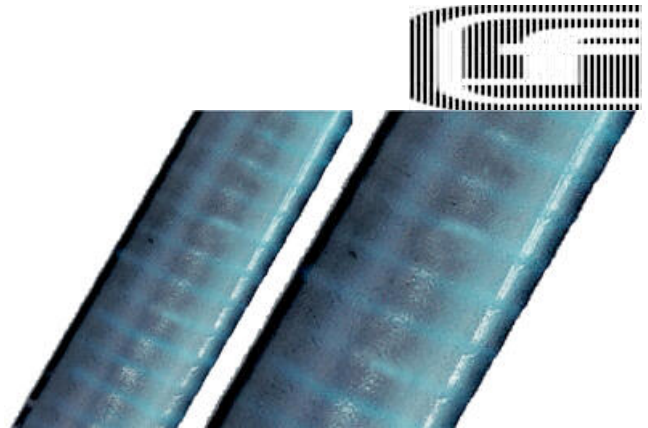


PRODUCT DESCRIPTION

LIQUID-TIGHT-EF is a protective metal conduit made from galvanized steel, covered with a PVC sheathing. Suitable for use in various applications where liquid-tight construct is required. IP68 rated.

Examples of use include electrical installations in automation, machinery and equipment and automotive industry.

Profile

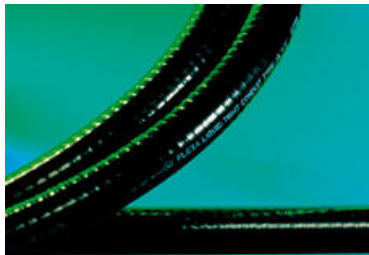

TECHNICAL DATA

Approvals	VDE
Bending radius $\pm 10\%$ dynamic	265
Bending radius -10% static	105
Colour	Grey
Diameter	5/16"
Inner dimensions	10 mm
Outer dimensions	14.5 mm
Pack size	50 m
Temperature operational max	90 °C

Temperature operational min	-25 °C
-----------------------------	--------

Weight / m	0.14
------------	------

