


## LIQUID-TIGHT-EF PROTECTIVE METAL CONDUIT

2080.111.021

LIQUID-TIGHT-EF AD3/4" grey

- Conduit made from galvanized steel, PVC sheathing
- Liquid-tight
- Resistant against chemicals and oils
- Flame-resistant
- IP68 rated

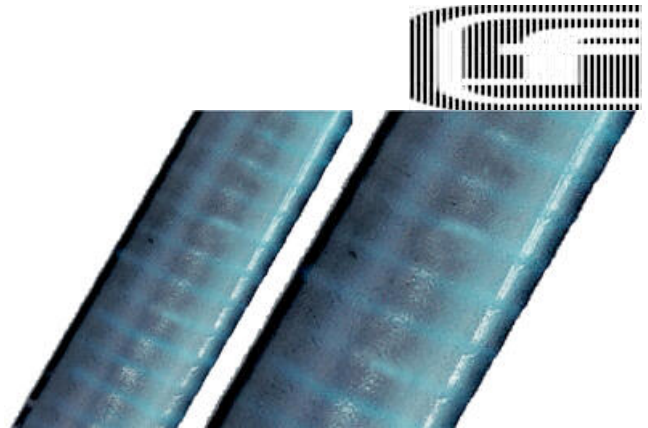


### PRODUCT DESCRIPTION

LIQUID-TIGHT-EF is a protective metal conduit made from galvanized steel, covered with a PVC sheathing. Suitable for use in various applications where liquid-tight construct is required. IP68 rated.

Examples of use include electrical installations in automation, machinery and equipment and automotive industry.

#### Profile

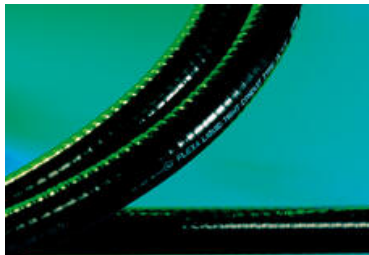

## TECHNICAL DATA

Approvals	VDE
Bending radius $\pm 10\%$ dynamic	475
Bending radius -10% static	190
Colour	Grey
Diameter	3/4"
Inner dimensions	21 mm
Outer dimensions	26.5 mm
Pack size	50 m
Temperature operational max	90 °C

Temperature operational min	-25 °C
-----------------------------	--------

Weight / m	0.44
------------	------

