OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

SPR-AS METAL CONDUIT

1010.111.016
SPR-AS AD19 16x19 mm metal conduit



- Galvanized steel
- Flexible
- Good tensile strenght and compression resistance
- Provides protection against high mechanical stress

PRODUCT DESCRIPTION

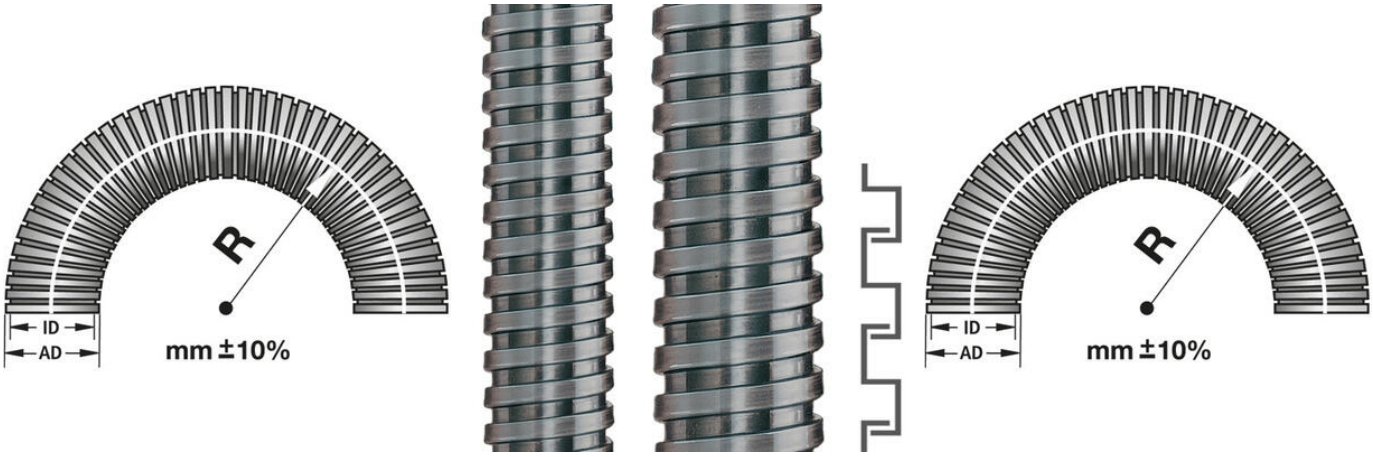
SPR-AS is a protective metal conduit made from galvanized steel. Highly versatile conduit for wide variety of applications.

TECHNICAL DATA

TECHNICAL DATA

Hose dimension AD	19
Inner dimensions	16 mm
Outer dimensions	19 mm
Pack size	50 m
IP class	IP40
Approvals	VDE, BWB
Bending radius -10% static	35
Bending radius ±10% dynamic	90
Temperature operational min	-50 °C
Temperature operational max	250 °C
Weight / m	0.15
Material	Galvanized steel
Type	SPR-AS

UV resistant	Yes
Halogen-free	Yes


R
ID
AD
mm ±10%
R
ID
AD
mm ±10%

