OEM Automatic Ltd
Address: Whiteacres, Whetstone Leicester, LE8 6ZG
0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk

SPR-AS METAL CONDUIT

1010.111.051
SPR-AS AD56 51x56 mm metal conduit



- Galvanized steel
- Flexible
- Good tensile strenght and compression resistance
- Provides protection against high mechanical stress

PRODUCT DESCRIPTION

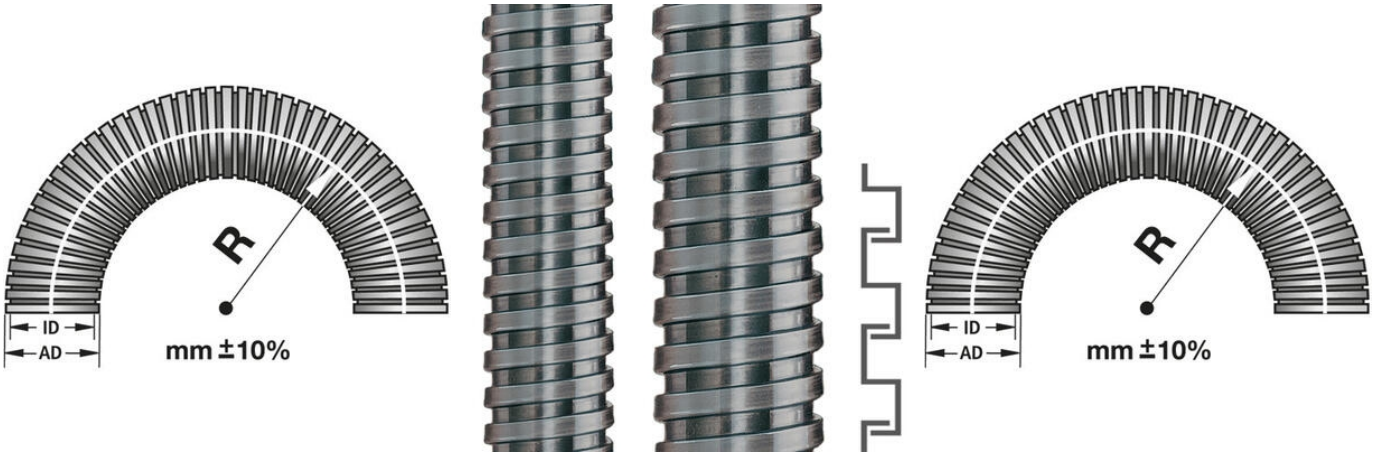
SPR-AS is a protective metal conduit made from galvanized steel. Highly versatile conduit for wide variety of applications.

TECHNICAL DATA

TECHNICAL DATA

Hose dimension AD	56
Inner dimensions	51 mm
Outer dimensions	56 mm
Pack size	25 m
IP class	IP40
Approvals	VDE, BWB
Bending radius -10% static	100
Bending radius ±10% dynamic	250
Temperature operational min	-50 °C
Temperature operational max	250 °C
Weight / m	0.8
Material	Galvanized steel
Type	SPR-AS

UV resistant	Yes
Halogen-free	Yes


R
ID
AD
mm ±10%
R
ID
AD
mm ±10%

