



SPR-AS METAL CONDUIT

1010.111.016


SPR-AS AD19 16x19 mm metal conduit

- Galvanized steel
- Flexible
- Good tensile strength and compression resistance
- Provides protection against high mechanical stress



PRODUCT DESCRIPTION

SPR-AS is a protective metal conduit made from galvanized steel. Highly versatile conduit for wide variety of applications.

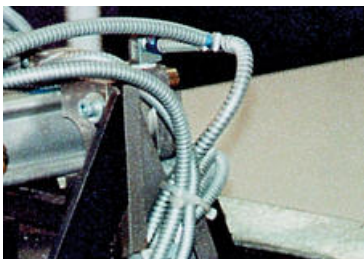

TECHNICAL DATA

Approvals	VDE, BWB
Bending radius $\pm 10\%$ dynamic	90
Bending radius -10% static	35
Halogen-free	Yes
Hose dimension AD	19
Inner dimensions	16 mm
IP class	IP40
Material	Galvanized steel
Outer dimensions	19 mm
Pack size	50 m
Temperature operational max	250 °C
Temperature operational min	-50 °C
Type	SPR-AS
UV resistant	Yes
Weight / m	0,15

