



# AUER PANEL MOUNTED BUZZER

812500405  
Panel mount buzzer, Ø30mm, Black, 12-24 V ac/dc,  
ESK

- Panel mounted buzzer with loud sound level
- Adjustable volume
- 3 selectable sound signals
- For mounting in drilled holes 22.5 mm or 30.5 mm



## PRODUCT DESCRIPTION

Panel mounted buzzer with wide voltage range and high enclosure class, IP65. Excellent when you want to call for extra attention in a panel.

## TECHNICAL DATA



Diameter	30 mm
Housing Colour	Black
IP class	IP65
Nominal current max	0,04 A
Nominal current min	0,04 A
Number of optional modules	0
Number of tones	2
Sound level max	65 dB
Sound level min	65 dB
Supply voltage ac/dc max	24 V
Supply voltage ac/dc min	10 V
Temperature operational max	60 °C
Temperature operational min	-25 °C
Terminal connection	2,5 mm <sup>2</sup>

Tone frequency max	3500 Hz
Weight	30 g

Tone table

Tone set terminals		
La	N	Lb
X	X	pulling tone
X	X	card/monitor tone

ESK

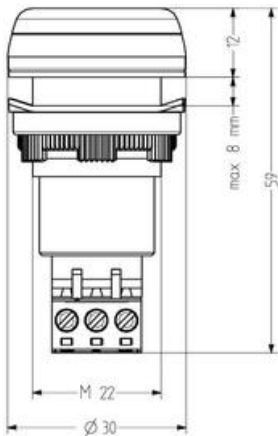

Distance (m)		Sound pressure dB (A)															
1	65	70	75	80	85	90	92	94	96	98	100	102	104	106	108	110	112
2	59	64	69	74	79	84	86	88	90	92	94	96	98	100	102	104	106
3	55	60	65	70	75	80	82	84	86	88	90	92	94	96	98	100	102
5	51	56	61	66	71	76	78	80	82	84	86	88	90	92	94	96	98
10	45	50	55	60	65	70	72	74	76	78	80	82	84	86	88	90	92
20	39	44	49	54	59	64	66	68	70	72	74	76	78	80	82	84	86
30	35	40	45	50	55	60	62	64	66	68	70	72	74	76	78	80	82
50	36	41	46	51	56	60	62	64	66	68	70	72	74	76	78	80	82
100		40	45	50	52	54	56	58	60	62	64	66	68	70	72	74	76
200			39	44	46	48	50	52	54	56	58	60	62	64	66	68	70
500				38	40	42	44	46	48	50	52	54	56	58	60	62	64



Justerbar volym  
med hjälp av  
potentiometer,  
(ej ESK.)

